

Kripper Wall Light



Features

- A Stylish, beautiful, sleek appearance
- Extremely economic and effective light
- Housing: Aluminium Body + Temper Glass
- Quick and easy to install



Wall



IK Rating
IK06




IP Rating
IP65





Standard Warranty

TECHNICAL DATA SHEET - KRIPPER - 13802 - WALL LIGHT

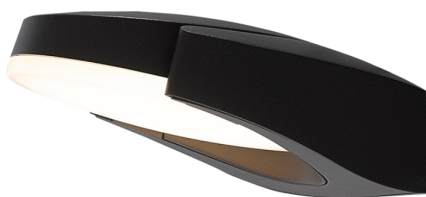

TECHNICAL DATA

| | |
|-------------------------------|---|
| Product Data | Wall light |
| Lamp Type | BRIDGELUX LED |
| Wattage | 6W |
| Color Temperature | 3000K |
| Rated Luminaire Luminous Flux | 540lm |
| Rated Luminaire Efficiency | 90lm/W |
| IP Rating | 65 |
| Beam Angle | 118° |
| Voltage | AC220-240V |
| Frequency Range | 50/60Hz |
| CRI | Ra>80 |
| Power Factor | >0.9 |
| Operating Temperature | -20°C ~ +50°C |
| IK Rating | 06 |
| Safety Class | Class I |
| Material | Die cast aluminum body+Temper glass |
| Finish | Black |
| Lifespan | 50,000 Hours |
| Warranty | 5 Years |
| Applications | Outdoors, Residential, Commercial, Hospitality etc. |

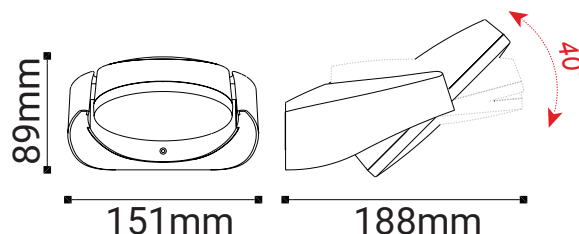

TECHNICAL OPTIONS

| | |
|-------------------|--------------------------------|
| Color Temperature | 4000K / 6000K |
| Finish | Dark Grey / White / Rust |
| Control | Switchable, TRIAC, 1-10V, Dali |

