

Luztrada Recessed Downlight



Features

- Housing material: Aluminum with good performance
- Powder coated surface treatment, durable and not easy to fall off
- PC cover with high transmittance, offering uniform and comfortable light
- Excellent heat dissipation

 **Recessed**

 **UGR**
<19

 **IP Rating**
IP54



6 years
warranty **Standard Warranty**

TECHNICAL DATA SHEET - LUZTRADA - 14581 - RECESSED DOWNLIGHT



TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	BRIDGLUX LED
Wattage	16W
Color Temperature	3000K
Rated Luminaire Luminous Flux	1040lm
Rated Luminaire Efficiency	65lm/W
IP Rating	54
Beam Angle	90°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
Output Current	260mA
Safety Class	Class II
UGR	<19
Operating Temperature	-20°C ~ +40°C
Material	Die Cast Aluminium + PMMA Diffuser
Finish	White
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

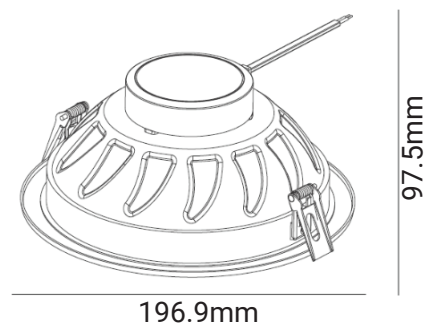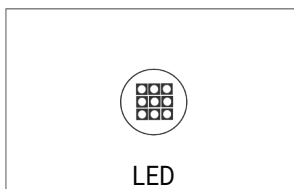

Cutout: 175mm

TECHNICAL OPTIONS

Wattage	10W / 15W / 20W / 30W
Color Temperature	3000K-6000K
Control	Switchable, TRIAC, 1-10V, DALI,0-10V