

Dido

Linear Light



Features


- The Dido linear light series adopts high-quality aluminum alloy lamp body
- The modular design of the lamp body shell and the light source aluminum material makes the lamp installation simple and convenient for future maintenance



UGR
<19



IP Rating
IP20



Light
Distribution

6
years
warranty

Standard Warranty

Configuration



Pendant




Recessed




Surface

TECHNICAL DATA SHEET - DIDO - LINEAR LIGHT

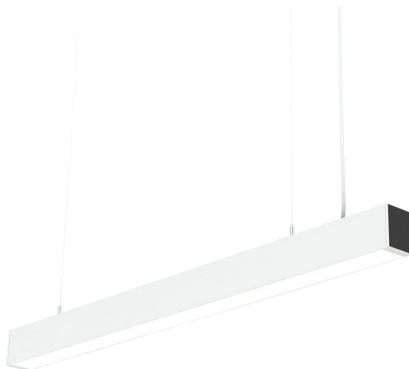


GENERAL INFORMATION


Product Data	Linear Light
Lamp Type	SAMSUNG LED
Driver	TRIDONIC
Color Temperature	3000K/4000K/6000K
Rated Luminaire Efficiency	Upto 95lm/W
IP Rating	20
Beam Angle	83.5°
L & B Rating	L80/B10 at 50,000 Hours
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80 (90 optional)
Power Factor	>0.9
Diffuser	PMMA
Safety Class	Class I
Material	PC
Finish	White
Life Span	60,000 Hours
Warranty	6 Years
Applications	Indoors

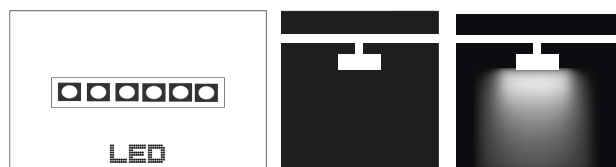

15W




30W



1135mm

45W



1135mm

TECHNICAL OPTIONS

Wattage	52W/60W
Control	Switchable, DALI, TRIAC, 1-10V
Finish	Black/Green/Yellow/Orange/Grey
Configuration	Recessed/Surface mounted


TECHNICAL DATA SHEET - DIDO - LINEAR LIGHT

TECHNICAL DATA (DIRECT)

SKU	Wattage	CCT	Lumen	Output Current	Dimension(mm)
16281	15W	3000K	1275lm	350mA	L575xW78xH102
16282	15W	4000K	1350lm	350mA	L575xW78xH102
16283	15W	6000K	1425lm	350mA	L575xW78xH102
16287	30W	3000K	2550lm	700mA	L1135xW78xH102
16288	30W	4000K	2700lm	700mA	L1135xW78xH102
16289	30W	6000K	2850lm	700mA	L1135xW78xH102
16280	45W	3000K	3825lm	1200mA	L1135xW78xH102
14848	45W	4000K	4050lm	1200mA	L1135xW78xH102
15345	45W	6000K	4275lm	1200mA	L1135xW78xH102


TECHNICAL DATA SHEET - DIDO - LINEAR LIGHT

INSTALLATION

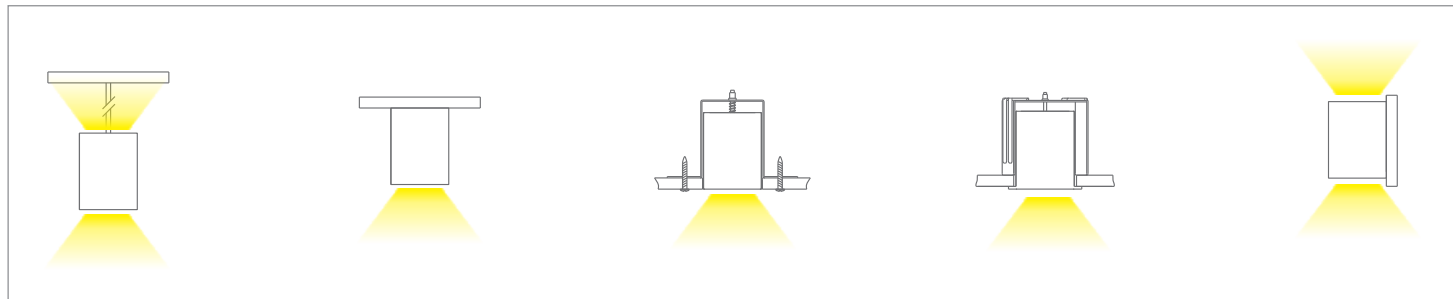


CUSTOMISATION

Profile

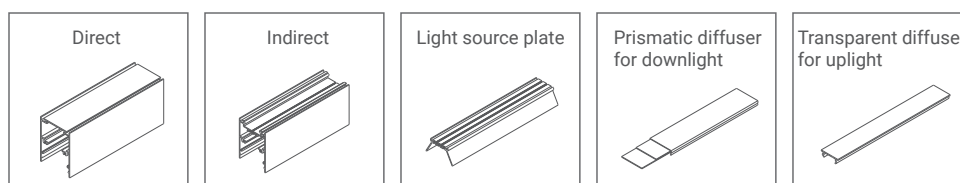

Connection

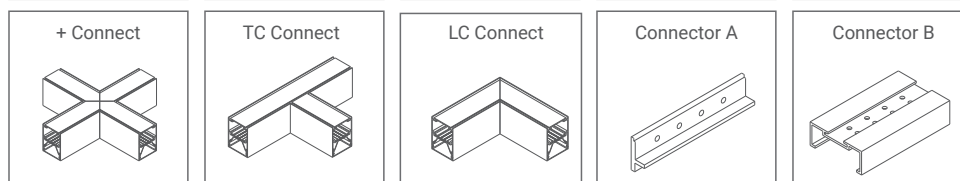

Installation Accessories

