

Rejilla

Trimless Recessed Spotlight



Features

- Selected LED chip with efficient driver, energy-saving with 50000 hours lifespan
- PC cover with high transmittance, offering uniform and comfortable light
- Excellent aluminum reflector offers even and better light color, bringing visual comfort
- Housing material: Aluminum with good performance



Recessed



IP Rating
IP44

Colour Rendering Index
≥80

6 years
warranty



Standard Warranty

TECHNICAL DATA SHEET - REJILLA - 14918 - RECESSED SPOTLIGHT



TECHNICAL DATA

Product Data	Recessed Spotlight
Lamp Type	PHILIPS LED
Driver	LIFUD DRIVER
Wattage	30W
Color Temperature	3000K
Rated Luminaire Luminous Flux	1950lm
Rated Luminaire Efficiency	65lm/W
IP Rating	44
Beam Angle	30°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
Output Voltage	27-42V
Output Current	700mA
Safety Class	Class II
THD	≤ 15%
Operating Temperature	-20°C ~ +40°C
Storage Temperature	25°C
SDCM(MacAdam)	< 3
Material	Die Cast Aluminum body
Finish	Black + Iron Gray
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

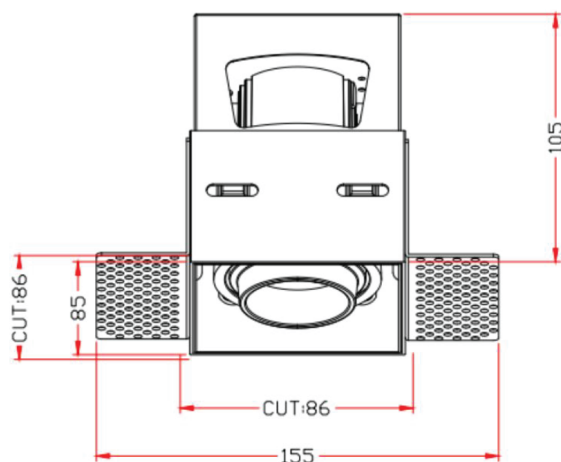

Unit: mm

TECHNICAL OPTIONS

Wattage	2x30W, 3x30W
Color Temperature	2700K-6000K
Beam Angle	15°/24°/36°/45°
Control	Switchable/0-10V/TRIAC / DALI / 1-10V

