



Gordon

Pendant Light



Features

- The appearance of exquisite cylinder shape creates the visual impression of ultra minimalist.
- Deep recessed cut-off beam angle presents Gordon Pendant as an ideal solution for high contrast application
- Distinctive finish colour can be customised to address architecture requirements.



Installation
Suspended



IP Rating
IP44



UGR
<10

6 years
warranty



Standard Warranty

TECHNICAL DATA SHEET - GORDON - 14942 - PENDANT LIGHT




TECHNICAL DATA

Product Data	Pendant Light
Lamp Type	CITIZEN LED
Wattage	7W
Color Temperature	3000K
Rated Luminaire Luminous Flux	420lm
Rated Luminaire Efficiency	70lm/W
IP Rating	44
Beam Angle	15°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>90
Power Factor	>0.9
Output Current	160mA
Safety Class	Class II
Operating temperature	-20°C ~ +40°C
SDCM	<3
Material	Die Cast Aluminium
Finish	Titanium
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Hospitality, Commercial, etc.

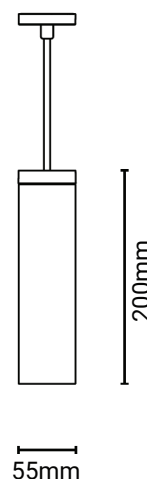

15°

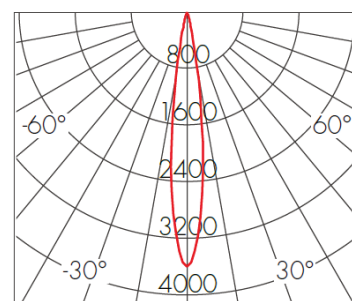

TECHNICAL OPTIONS

Wattage	5W
Color Temperature	3000K-6000K
Beam Angle	24° / 36°
Finish	White/Black/Gold/Silver
Control	Switchable, TRIAC, 1-10V, DALI, 0-10V

H(m)	Eavg(lx)	Emax(lx)	D(cm)
1	2473	3797	25
2	618	949	50
3	275	422	74
4	155	237	99
5	99	152	124