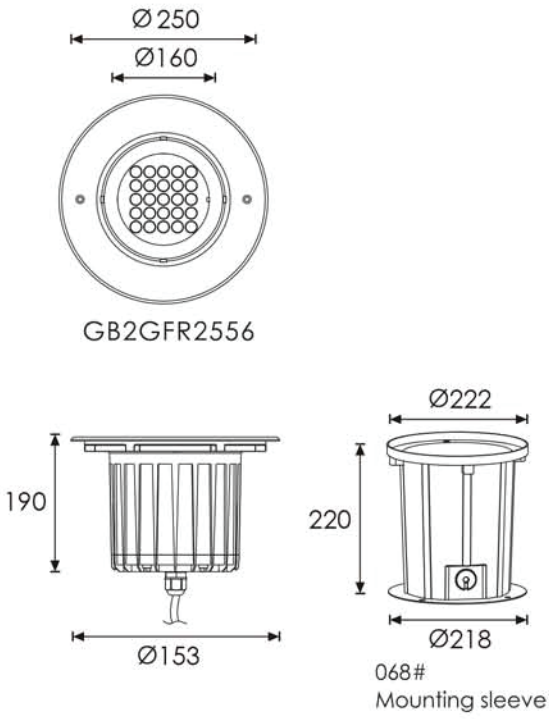
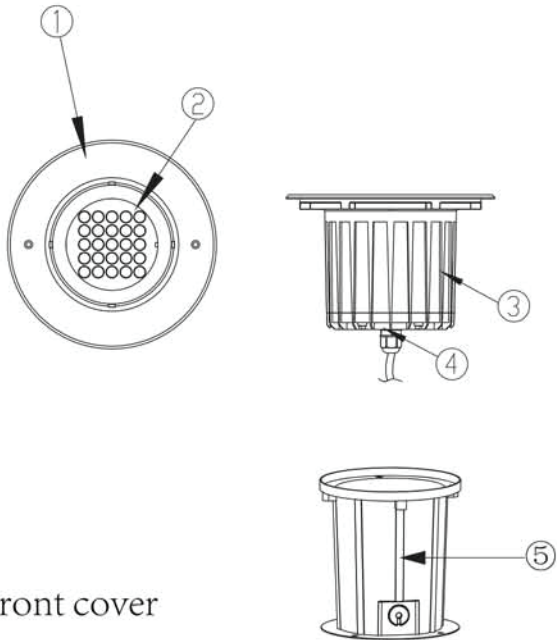


Installation Instruction


OUTLINE DIMENSION	BOM
 <p>GB2GFR2556</p> <p>Unit: mm</p>	 <p>① Front cover ② Optical Lens ③ Housing ④ Cable gland ⑤ Mounting Sleeve</p>

Note: The drawing was show a general introduction to this description.
When the discrepancy between the actual product and drawing,
please all to the actual products.

1.FEATURES

- This product is a high power LED inground light.
- The standard color temperature of warm white is in range 2700-3200k.
- The standard input voltage is 100-240VAC. When you install the product, please check the data label on the product and on the wire.
- When installation, always work with technician or install by technian.
- The main material of this product is aluminum, surface coating is only suitable for natural environment, don' t install this product near the sea water or in the environment which is high salty or high acid.
- This is IP67 grade product, don' t put fixture into water.
- Applicable environment temperaturvre: $-20^{\circ}\text{C} < \text{fixture} < +40^{\circ}\text{C}$

2. INSTALLATION

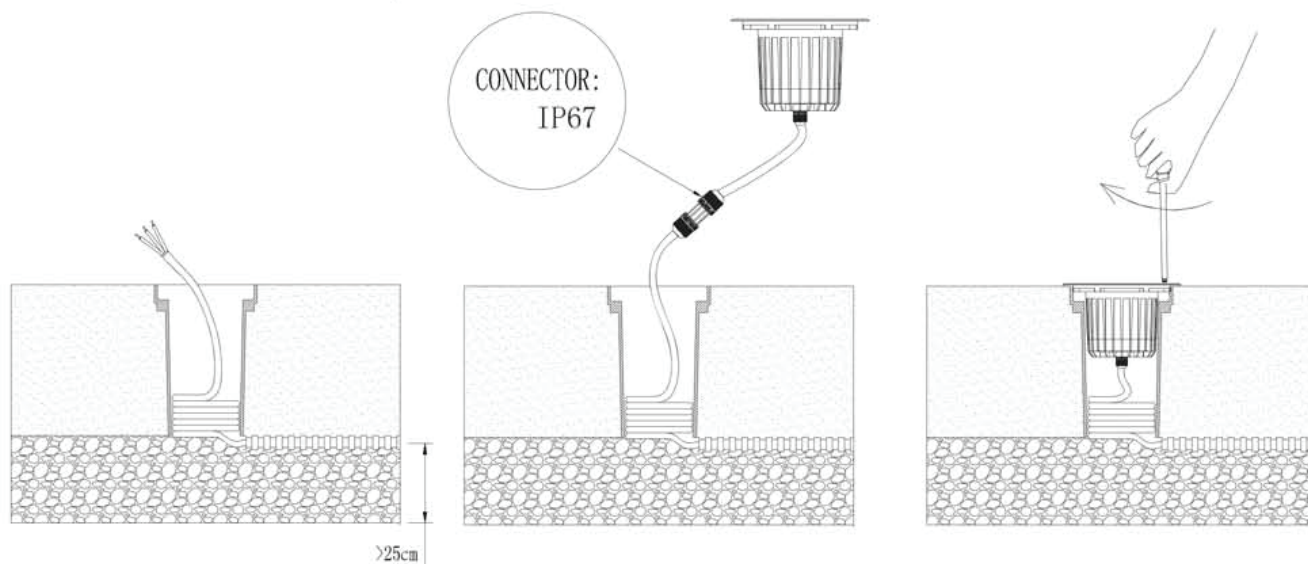


Install the mounting sleeves on the ground, the top side should be on the same level with the ground surface, power cable need to go through the mounting sleeve.

Connect the power cable with the lighting fixture. *keep enough length for maintain*

Fix the lighting fixture with the mounting sleeve by a screwdriver.


Note: The thickness of the gravel must thicker than 25 cm.

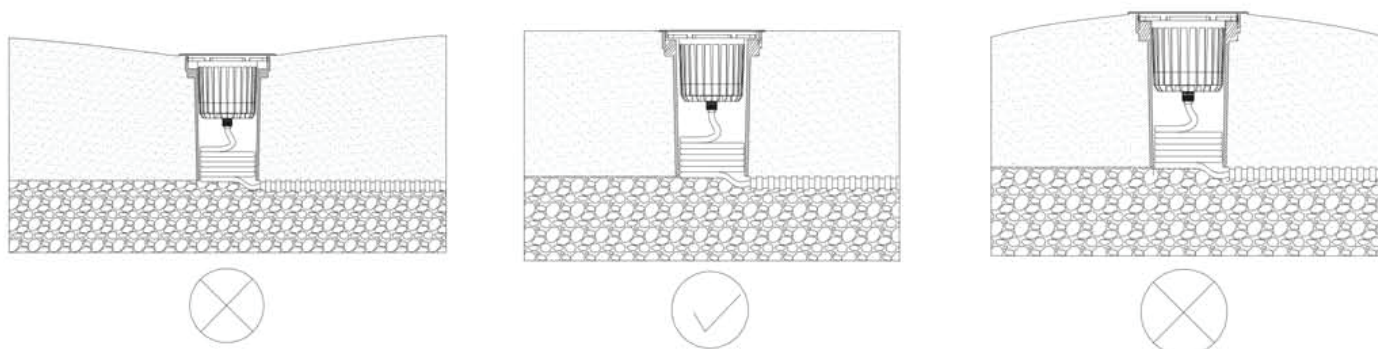

3. WIRING DIAGRAM

3.1: High voltage single color fitting: refer to the following recommended wiring method.

Example of wiring:

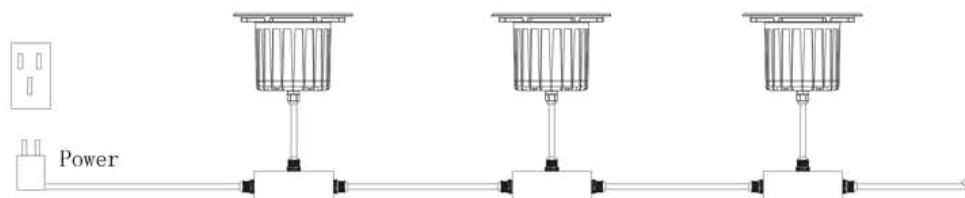

100-240VAC: circuit of product

