

Clavo

Flood/Spike light



Features

- 12# Die-casting dark grey powder coated aluminum
- Tempered glass.T=3mm
- Constant Voltage Input,Constant Current Output
- Tooling shaped seal Gasket



Surface



IP Rating
IP66



IK Rating
IK06






Standard Warranty

TECHNICAL DATA SHEET - CLAVO - 15121 - FLOOD/SPIKE LIGHT



TECHNICAL DATA

Product Data	Flood Light
Lamp Type	OSRAM LED
Wattage	6W
Color Temperature	3000K
Rated Luminaire Luminous Flux	540lm
Rated Luminaire Efficiency	90lm/W
IP Rating	66
Beam Angle	30°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Lens	A24
Operating Current	65mA
IK Rating	06
Safety Class	Class I
Operating Temperature	-20°C ~+50°C
Material	Aluminium Body
Finish	Dark Grey
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Hospitality, etc.

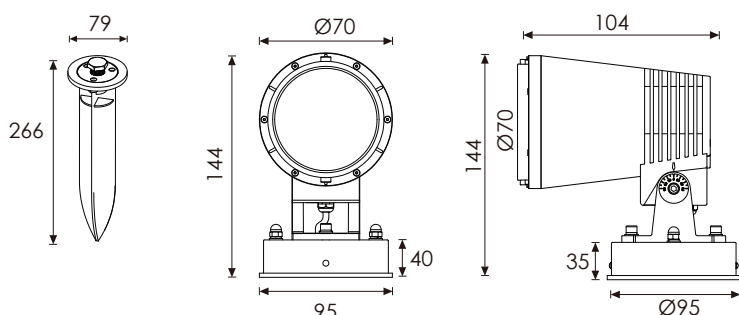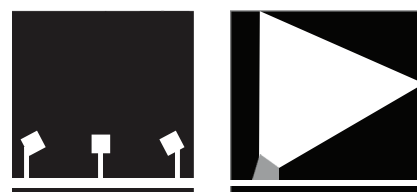

Unit: mm

Lux distance cure

Illuminance at a distance				
Center beam LUX		Beam width		
		V	H	
2m	178.22 LUX	1.1m	1.1m	
4m	44.55 LUX	2.2m	2.2m	
6m	19.80 LUX	3.3m	3.3m	
8m	11.14 LUX	4.4m	4.4m	
10m	7.13 LUX	5.5m	5.4m	
12m	4.95 LUX	6.6m	6.5m	
Ver.Spread:30.7		Horiz.Spread:30.5		

TECHNICAL OPTIONS

Wattage	12W / 20W / 40W
Color Temperature	3000K - 6000K
Beam Angle	9°/15°/20°/45°
Finish	Silver Grey/Black/White
Control	Switchable/TRIAC/DALI/1-10V/PWM