

Cima

Suspended Mounted



Features

- Ring shaped luminaire housing from aluminium profile, seamlessly welded.
- LED Luminaire comes with specialized LED PMMA Diffuser



Installation
Suspended



UGR
<21



IP Rating
IP42





Standard Warranty

TECHNICAL DATA SHEET - CIMA - 15184 - SUSPENDED MOUNTED



TECHNICAL DATA

Product Data	Suspended Mounted
Lamp Type	SAMSUNG LED
Driver	OSRAM
Wattage	60W
Color Temperature	4000K
Rated Luminaire Luminous Flux	6600lm
Rated Luminaire Efficiency	110lm/W
IP Rating	42
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Output Current	1400mA
Safety Class	Class II
Operating temperature	-20°C ~ +40°C
SDCM	<3
Dimension	Ø900x32x38mm
Material	Aluminum Body+PMMA Diffuser
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Hospitality, Commercial, etc.

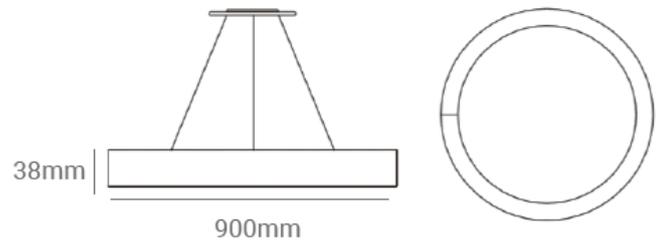

TECHNICAL OPTIONS

Wattage	40W/50W/80W/100W/120W/200W
Color Temperature	3000K-6500K
Control	Switchable, TRIAC, 1-10V, DALI, 0-10V