

## Esfera

### Recessed Downlight



### Features

- New appearance with high performance, more compact, more professional
- High quality PMMA diffuser distribution soft light
- Imported reflected paper with 96% reflective rate
- Textured white finish perfect match with your ceiling
- Aluminium alloy anti-glare front ring



**Recessed**



**IP Rating**  
IP44



**UGR**  
**<21**





**Standard Warranty**

## TECHNICAL DATA SHEET - ESFERA - 15295 - RECESSED DOWNLIGHT



### TECHNICAL DATA

|                               |                                           |
|-------------------------------|-------------------------------------------|
| Product Data                  | Recessed Downlight                        |
| Lamp Type                     | BRIDGELUX LED                             |
| Wattage                       | 8W                                        |
| Color Temperature             | 4000K                                     |
| Rated Luminaire Luminous Flux | 600lm                                     |
| Rated Luminaire Efficiency    | 75lm/W                                    |
| IP Rating                     | 44                                        |
| Beam Angle                    | 80°                                       |
| Voltage                       | AC220-240V                                |
| Frequency Range               | 50-60 Hz                                  |
| CRI                           | Ra>80                                     |
| Power Factor                  | >0.95                                     |
| SDCM(Macadam step)            | < 7                                       |
| Output Current (mA)           | 190mA                                     |
| Safety Class                  | Class II                                  |
| Operating Temperature         | -20°C ~ +40°C                             |
| Material                      | Aluminium + PMMA Milky Diffuser           |
| Finish                        | White                                     |
| Life Span                     | 60,000 Hours                              |
| Warranty                      | 6 Years                                   |
| Applications                  | Residential, Commercial, Hospitality etc. |

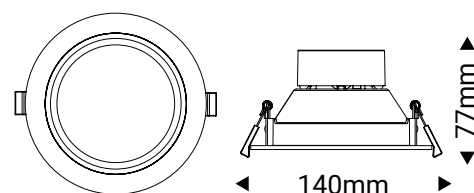

Cutout: Ø125mm

### TECHNICAL OPTIONS

|                   |                                   |
|-------------------|-----------------------------------|
| Wattage           | 12W / 16W / 20W                   |
| Color Temperature | 3000K-6000K                       |
| Control           | Switchable/TRIAC/0-10V/DALI/1-10V |

