# Cofa

## Ceiling Mounted Light

## Features

- Housing: Extruded aluminum alloy #6063
- Painting: Powder coating ,T= 60~80 um.
- Reflector: Optical reflector. effciency≥85%
- High Lumen Efficiency
- Easy to install

**Surface**

**IK Rating**
IK06

**IP Rating**
IP65

5 years warranty **Standard Warranty**

SYV Iluminacion Europea, Sociedad Limitada
Avda San Pablo 28 - 28820,
Madrid - Spain

© 2020 SYV

# Cofa

## TECHNICAL DATA SHEET - COFA - 15410 - CEILING MOUNTED LIGHT

### TECHNICAL DATA

| | |
|---|---|
| **Product Data** | Ceiling light |
| **Lamp Type** | NICHIA LED |
| **Wattage** | 30W |
| **Color Temperature** | 3000K |
| **Rated Luminaire Luminous Flux** | 3000lm |
| **Rated Luminaire Efficiency** | 100lm/W |
| **IP Rating** | 65 |
| **Beam Angle** | 25° |
| **Voltage** | AC220-240V |
| **Frequency Range** | 50/60Hz |
| **CRI** | Ra>80 |
| **Power Factor** | >0.9 |
| **Output Current** | 151mA |
| **SDCM (MacAdam)** | <4 |
| **Operating Temperature** | -20°C ~ +50°C |
| **IK Rating** | 06 |
| **Safety Class** | Class I |
| **Material** | Aluminium Alloy + Optical Reflector |
| **Finish** | Dark Grey |
| **Lifespan** | 50,000 Hours |
| **Warranty** | 5 Years |
| **Applications** | Outdoors, Residential, Commercial, Hospitality etc. |

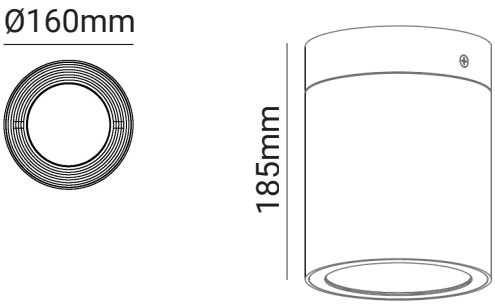


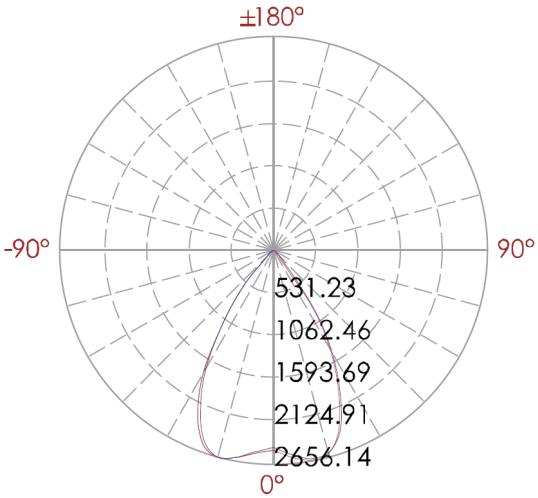


### TECHNICAL OPTIONS

| | |
|---|---|
| **Wattage** | 18W / 48W |
| **Color Temperature** | 3000K-6000K |
| **Beam Angle** | 15°/20°/38°/55° |
| **Finish** | Black/White |
| **Control** | Switchable, DALI, TRIAC, 0-10V, PWM |

SYV Iluminacion Europea, Sociedad Limitada
Avda San Pablo 28 - Naves 15 y 2 - 28820
Cosloda (Madrid) Spain
SYV Design is constantly developing and improving it's products. The right is reserved to change specification without prior notification or public announcement.