Viga
Panel light

Features

- White metal heat-sink base with modern design
- Instant start, no flicker, noise, UV, dark area and light leak
- Ultra-thin aluminum alloy with a good dissipation
- High transmittance PS/PC diffuser
- Anti shock and easy installation

Recessed

Colour Rendering Index
≥80

IP Rating
IP44

6 years warranty **Standard Warranty**

SYV Iluminacion Europea, Sociedad Limitada
Avda San Pablo 28 - 28820,
Cosloda (Madrid) Spain

© 2019 SYV

Viga

TECHNICAL DATA SHEET - VIGA - 15426 - PANEL LIGHT

TECHNICAL DATA

Product Data	Panel light
Lamp Type	SAMSUNG LED
Driver	BOKE Driver
Wattage	40W
Color Temperature	6000K
Rated Luminaire Luminous Flux	4000lm
Rated Luminaire Efficiency	100lm/W
IP Rating	44
Beam Angle	120°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Output Current	183mA
Safety Class	Class II
Operating Temperature	-20°C ~ +40°C
UGR	<19
SDCM(MacAdam)	< 4
Material	PMMA + LGP
Finish	White
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.



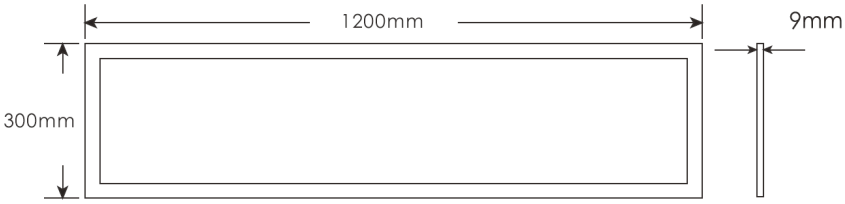

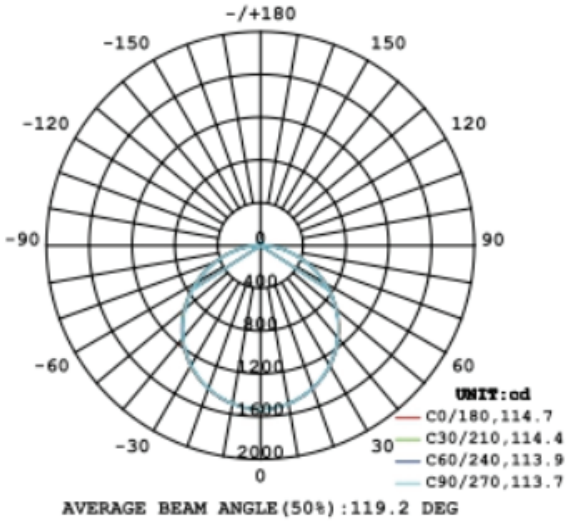

TECHNICAL OPTIONS

Color Temperature	3000K-6500K
Control	Switchable,TRIAC, 1-10V, Dali

SYV Design is constantly developing and improving it's products. The right is reserved to change specification without prior notification or public announcement.