


## Pito T8 Tube



### Features

- One ended & double ended bypass Type B
- Base: G13 available
- Environmentally friendly without mercury
- 100~120LPW high lumen efficiency
- No mercury glass so NO Regulated Universal Waste rules or fines

 **Tube**

 **IP Rating**  
IP20

**Colour Rendering Index**  
≥85



**5** years **Standard Warranty**  
warranty

## TECHNICAL DATA SHEET - PITO - 15615 - T8 TUBE WITH MICROWAVE SENSOR



### TECHNICAL DATA

Product Data	T8 Tube
Lamp Base	G13
Lamp Type	EPISTAR LED
Wattage	14W
Color Temperature	6000K
Rated Luminaire Luminous Flux	1470lm
Rated Luminaire Efficiency	105lm/W
IP Rating	20
Beam Angle	120°
Voltage	AC85-265V
CRI	Ra>85
Power Factor	>0.97
Frequency Range	50-60 Hz
Output Current	180mA
Operating Temperature	-20°C ~ +50°C
Safety Class	Class II
Sensor	Microwave Sensor
StandBy Time	2 min
StandBy Brightness	30%
Effective Induction Distance	8-10m
Material	Aluminum + PC
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Hospitals, Commercial, Hospitality etc.

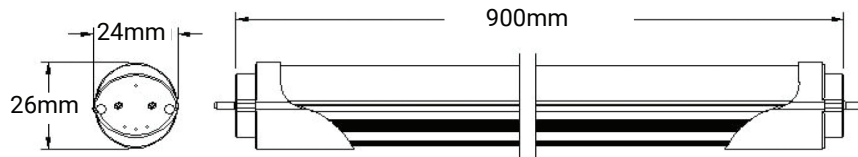

### TECHNICAL OPTIONS

Wattage	9W, 20W, 25W
Color Temperature	2700K - 6500K
Switchable	Switchable, DALI, TRIAC, 0-10V