

Liyamada

Suspended Mounted



Features

- Suspension Linear LED Circular Ring Light
Construction Size Ø1200/Ø1000X105mm
- 216pcs of Samsung LED
0.2~0.6W LED work at 0.4W
- PMMA Diffuser, Aluminium Rolling Frame,
- Molded Aluminium Backplate
- Current Constant LED Driver, 4X1.4m Stainless
Steel Wires for installation included



Installation
Pendant



UGR
<19



IP Rating
IP42

5
years
warranty



Standard Warranty

TECHNICAL DATA SHEET - LIYAMADA - 15627 - SUSPENDED MOUNTED



TECHNICAL DATA

Product Data	Suspended Mounted
Lamp Type	SAMSUNG LED
Wattage	90W
Color Temperature	4000K
Rated Luminaire Luminous Flux	9450lm
Rated Luminaire Efficiency	105lm/W
IP Rating	42
Voltage	AC90-250V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Output Current	2250mA
Operating temperature	-20°C ~ +40°C
Safety Class	Class II
UGR	<19
SDCM	<6
Material	Aluminium Profile + PMMA Diffuser
Finish	Matt White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Hospitality, Commercial, etc.

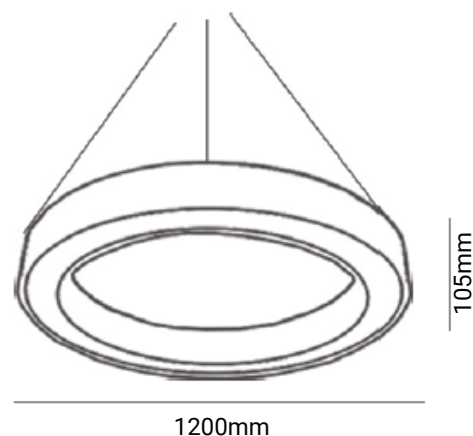

TECHNICAL OPTIONS

Wattage	30W / 45W / 60W / 72W
Color Temperature	3000K-6000K
Control	Switchable, TRIAC, 1-10V, DALI, 0-10V
Finish	Matt Black

