

Ostra Ceiling light



Features

- Ostra adopts high lumen SMD2835 LED, high light transmission polycarbonate diffuser with even light output
- It is competitive in quality and price with energy saving more than 75%-90%
- High efficiency and low energy consumption.



Surface

Colour Rendering Index
≥80



IP Rating
IP54



5 years
warranty Standard Warranty

TECHNICAL DATA SHEET - OSTRÁ - 16763 - CEILING LIGHT



TECHNICAL DATA

Product Data	Ceiling light
Lamp Type	PHILIPS SMD 2835 LED
Driver	LIFUD DRIVER
Wattage	12W
Color Temperature	6000K
Rated Luminaire Luminous Flux	960lm
Rated Luminaire Efficiency	80lm/W
IP Rating	54
Beam Angle	120°
Voltage	230V AC
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.5
Energy Efficiency Class	A+
Operating Temperature	-20°C ~ +40°C
Material	Polycarbonate Body
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Commercial, Hospitality etc.

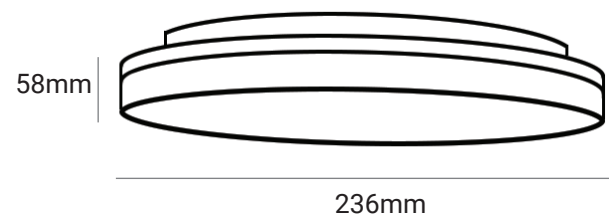

TECHNICAL OPTIONS

Wattage	18W / 24W
Color Temperature	2700K - 6500K
Control	Switchable, 0-10V, 1-10V, TRIAC, DALI
Optional	Emergency Kit