

## Primera Industrial Light



### Features

- High quality Nichia chips deliver over 105 lumens per watt
- UL/cULs high quality driver
- UL 1598 listed for wet locations
- Superior cooling performance
- Light weight, less burden, saving shipping cost and easy for installing
- Sturdy Die-Cast Aluminum Housing
- Photocell sensor, motion sensor and dimmable optional



Wall



IP Rating  
IP65



UGR  
<33





Standard Warranty

## TECHNICAL DATA SHEET - PRIMERA - 16820 - INDUSTRIAL LIGHT



### TECHNICAL DATA

|                               |                                          |
|-------------------------------|------------------------------------------|
| Product Data                  | Wall Light                               |
| Lamp Type                     | NICHIA LED                               |
| Wattage                       | 40W                                      |
| Color Temperature             | 3000K                                    |
| Rated Luminaire Luminous Flux | 4400lm                                   |
| Rated Luminaire Efficiency    | 110lm/W                                  |
| IP Rating                     | 65                                       |
| Beam Angle                    | 120°                                     |
| Voltage                       | AC100-277V                               |
| Frequency Range               | 50-60 Hz                                 |
| CRI                           | Ra>70                                    |
| Power Factor                  | >0.92                                    |
| Safety Class                  | Class I                                  |
| Operating Temperature         | -20°C ~ +50°C                            |
| Material                      | Die Cast Aluminium Body + Prismatic Lens |
| Finish                        | Bronze                                   |
| Life Span                     | 60,000 Hours                             |
| Warranty                      | 6 Years                                  |
| Applications                  | Warehouse, Industrial, etc.              |

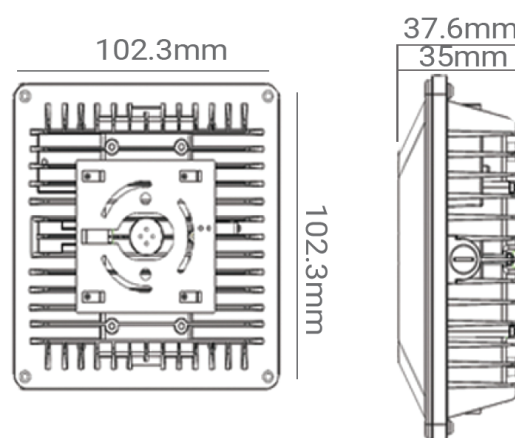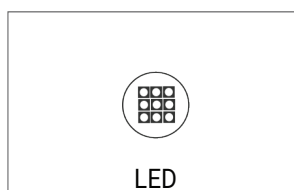

### TECHNICAL OPTIONS

|                   |                                                   |
|-------------------|---------------------------------------------------|
| Wattage           | 20W/30W/58W                                       |
| Color Temperature | 3000K-6000K                                       |
| Control           | Switchable, TRIAC, 1-10V, DALI                    |
| Optional          | Photocell, Motion sensor, dimming, Battery backup |

