

Flauta

Suspended Light



Features


- The sound absorbing panel is made of 100% polyester fiber material
- It has sound absorption, flame retardant, non—toxic, non—irritating and misunderstanding.
- It is a new material that integrates sound absorption, heat insulation and decorative effects.
- Light Distribution: Single Sided Lighting



UGR
<18



IP Rating
IP20



Light
Distribution

7
years
warranty


Standard Warranty

Configuration





Pendant

TECHNICAL DATA SHEET - FLAUTA - 17121 - SUSPENDED LIGHT

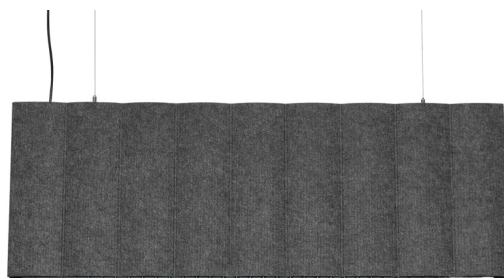

TECHNICAL DATA

Product Data	Suspended light
Lamp Type	OSRAM LED
Driver	OSRAM Driver
Wattage	30W
Color Temperature	4000K
Rated Luminaire Luminous Flux	3,150lm
Rated Luminaire Efficiency	105lm/W
IP Rating	20
Beam Angle	60°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
Power Efficiency	88%
Output Voltage	DC 27-54V
Output Current	600mA
Safety Class	Class I
Operating Temperature	-20oC ~ +40oC
Material	Aluminium + Fabric
Finish	Grey Acoustic
Life Span	70,000 Hours
Warranty	7 Years
Applications	Residential, Office, Conference room, Study, Library

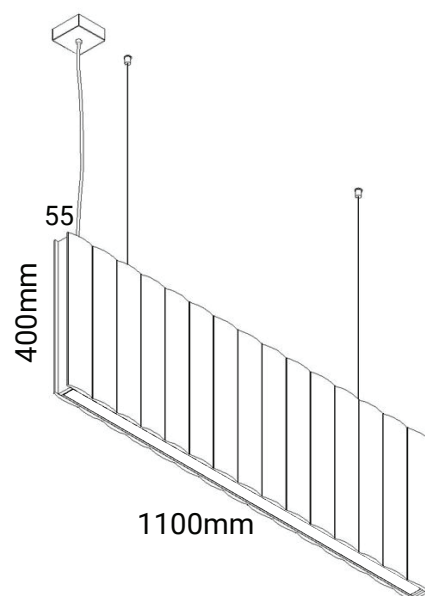

TECHNICAL OPTIONS

Color Temperature	3000K / 4000K / 6000K
Finish	Yellow, Red, Blue, Green, Orange
Control	Switchable/TRIAC/0-10V/DALI/1-10V

TECHNICAL DATA SHEET - FLAUTA - 17121 - SUSPENDED LIGHT

PHOTOMETRIC RESULTS

Central Intensity: 12715.56cd

Maximum Intensity: 12855.782cd

Beam Angle(10%): Left:-26.5 Right:24.9

Angle of maximum intensity: C:225.0 G:2.0

Half Peak Side Angle(50%): Left:-15.0 Right:11.7

Light Out Rate(LOR): 100.00%

