


Delmor

Recessed Downlight (Changeable CCT)



Slide switch for color selection

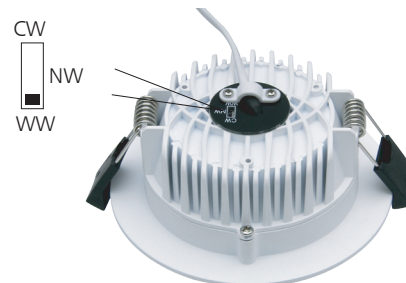

Features

- Up to 70% energy saving compared to standard CFL
- Environment friendly, without Mercury or any other hazardous substances
- CCT: 3000K 4000K 6000K
- 195mm cutout
- 90° wide beam angle
- No UV/IR light

 Recessed

 UGR <19

 IP Rating
IP44



6 years
warranty **Standard Warranty**

TECHNICAL DATA SHEET - DELMOR - 17197 - RECESSED DOWNLIGHT



TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	CITIZEN LED
Wattage	35W
Color Temperature	3000K, 4000K, 6000K
Rated Luminaire Luminous Flux	3570lm
Rated Luminaire Efficiency	102lm/W
IP Rating	44
Beam Angle	90°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
SDCM(Macadam step)	< 3
Output Current	1000mA
Output Voltage	DC27-40V
Safety Class	Class II
Operating Temperature	-20°C ~ +45°C
Efficiency	≥88%
Material	Aluminium Body
Finish	White
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

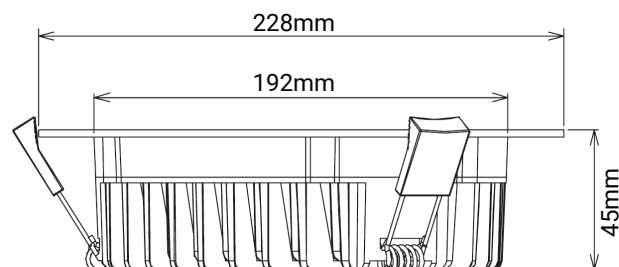




Cutout: Ø195mm

TECHNICAL OPTIONS


Wattage	10W / 18W
Control	Switchable/TRIAC/0-10V/DALI/1-10V

TECHNICAL DATA SHEET - DELMOR - 17197 - RECESSED DOWNLIGHT

PHOTOMETRIC DIAGRAM

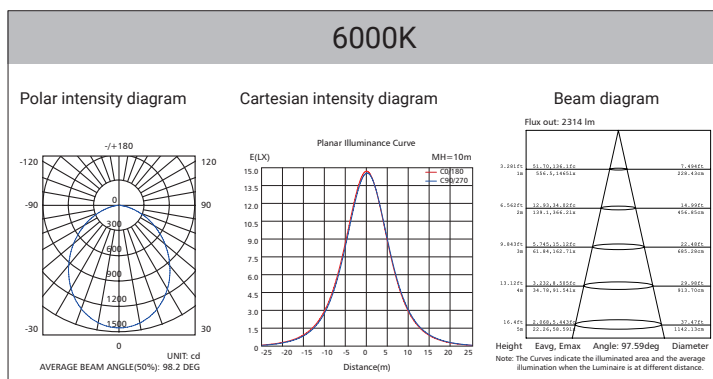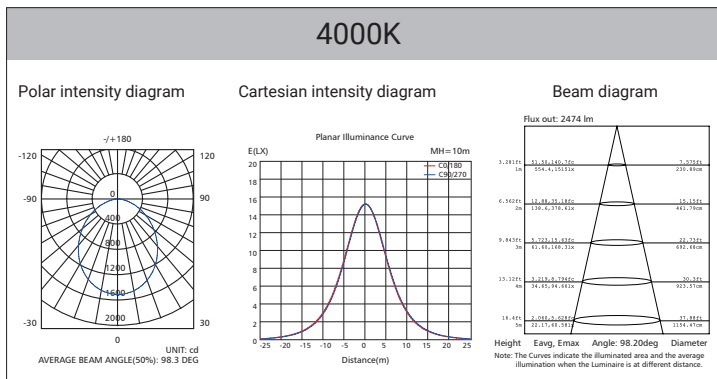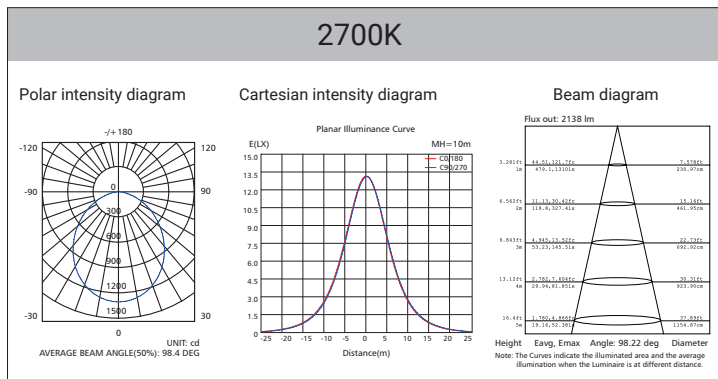

POLAR DIAGRAM COMPARISON

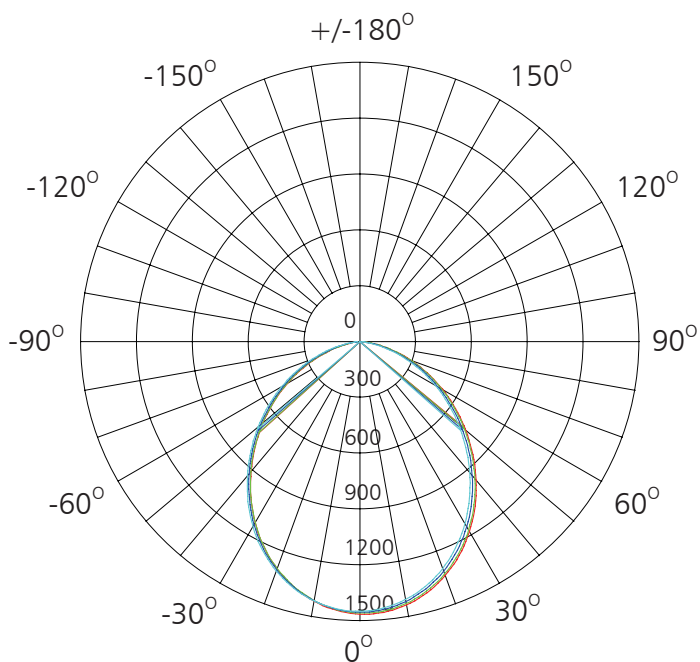

AVERAGE BEAM ANGLE (50%): 98.2DEG