

## Estrocho

### Recessed Adjustable Spotlight (Narrow Margin)



#### Features

- Best Lumen output efficacy 80lm/W
- Use of high-tech spraying technology, anti-corrosion
- Die cast aluminium body and heat sink designed for effective heat dissipation
- High Light Uniformity
- High value appearance and durability
- 2.5kV Protection
- 80% Energy Saving

 Recessed

 IP Rating  
IP44

 UGR  
<19



 6 years  
warranty Standard Warranty

## TECHNICAL DATA SHEET - ESTROCHO - 17276 - RECESSED ADJUSTABLE SPOTLIGHT



### TECHNICAL DATA

|                               |                                           |
|-------------------------------|-------------------------------------------|
| Product Data                  | Recessed Downlight                        |
| Lamp Type                     | BRIDGELUX LED                             |
| Driver                        | LIFUD Driver                              |
| Wattage                       | 8W                                        |
| Color Temperature             | 3000K                                     |
| Rated Luminaire Luminous Flux | 640lm                                     |
| Rated Luminaire Efficiency    | 80lm/W                                    |
| IP Rating                     | 44                                        |
| Beam Angle                    | 30°                                       |
| Voltage                       | AC220-240V                                |
| Frequency Range               | 50-60 Hz                                  |
| CRI                           | Ra>90                                     |
| Power Factor                  | >0.5                                      |
| Current                       | 180mA                                     |
| Safety Class                  | Class II                                  |
| Operating Temperature         | -20°C ~ +40°C                             |
| Storage Temperature           | 25°C                                      |
| SDCM(MacAdam)                 | < 3                                       |
| Material                      | Die cast Aluminium body                   |
| Finish                        | Black                                     |
| Life Span                     | 60,000 Hours                              |
| Warranty                      | 6 Years                                   |
| Applications                  | Residential, Commercial, Hospitality etc. |

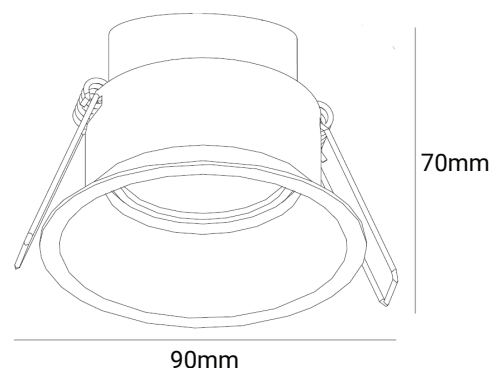

Cutout: 75mm

### TECHNICAL OPTIONS

|                   |                                   |
|-------------------|-----------------------------------|
| Wattage           | 6W / 10W                          |
| Color Temperature | 2700K - 6500K                     |
| Beam Angle        | 15° / 24°                         |
| Finish            | White                             |
| Control           | Switchable/TRIAC/0-10V/DALI/1-10V |