

## Nuevo Flood light



### Features

- PET reflector for high lumen efficacy of 135lm/w
- Comfortable lighting effect and effectively glare control by adopting newly designed frosted diffuser
- Optional to equip with infrared sensor for intelligent power saving
- Equipped with 10KV SPD for better protection under extreme power condition

Surface



IP Rating  
IP66



IK Rating  
IK08






Standard Warranty

## TECHNICAL DATA SHEET - NUEVO - 15999 - FLOOD LIGHT



### TECHNICAL DATA

Product Data	Flood Light
Lamp Type	LUMILED's
Driver	PHILIPS Driver
Wattage	150W
Color Temperature	3000K
Rated Luminaire Luminous Flux	18,750lm
Rated Luminaire Efficiency	125lm/W
IP Rating	66
Beam Angle	S14: 60°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>70
Power Factor	>0.95
SDCM	<5
THD (%)	≤10%
IK Rating	08
Operating Temperature	-30 °C to +50 °C
Surge	4KV
Safety Class	Class I
Material	Die cast aluminium body
Lens	Polycarbonate, Tempered glass
Finish	Aluminium Grey
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Commercial, Hospitality etc.

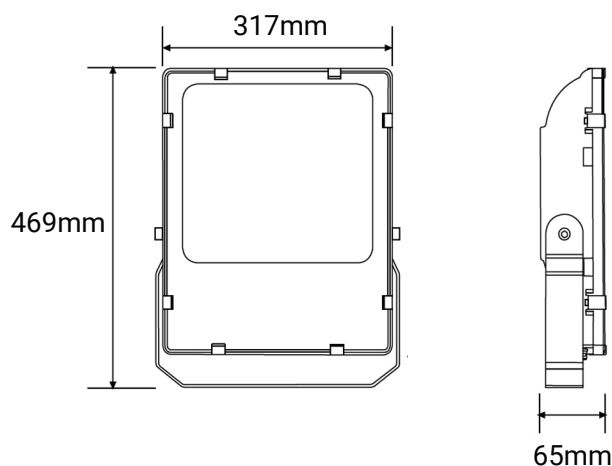

### TECHNICAL OPTIONS

Wattage	100W/200W/250W/300W
Color Temperature	3000K - 6000K
Control	1-10V dimming control; DALI