

Kevin Tree Ring light



Features

- Ø300 | Ø400 | Ø500 & Any Customized Size Available upon request
- Two, Four, Six or Eight Light per Ring
- IP66 Rated
- Housing: Die Cast aluminium body and honeycomb



Installation
on Trees



IK Rating
IK08



IP Rating
IP66





Standard Warranty

TECHNICAL DATA SHEET - KEVIN - 17912 - TREE RING LIGHT



TECHNICAL DATA

Product Data	Tree Ring Light
Lamp Type	BRIDGELUX LED
Wattage	4x10W
Color Temperature	3000K
Rated Luminaire Luminous Flux	4x1000lm
Rated Luminaire Efficiency	110lm/W each Spike
IP Rating	66
Beam Angle	30°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Ambient Temperature	-25°C ~+60°C
Safety Class	Class I
SDCM	3
Material	Die Cast Aluminium
Diffuser	Tempered glass & Honeycomb
Finish	Dark Brown
Ring Diameter	600mm
Dimension of the light	95x124mm
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Trees

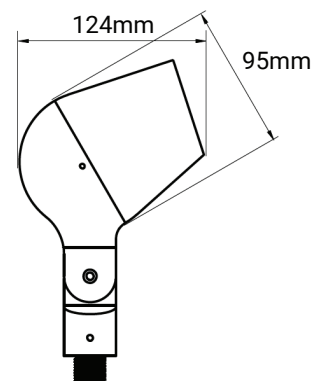

Ring Diameter: 600mm

TECHNICAL OPTIONS

Wattage	10W, 20W
Color Temperature	3000K - 6000K
Voltage	15°/24°/36°/60°/40*70°