

Liva

Recessed Linear light



Features

- High brightness, low light decline
- A narrow line of nano LED downlights for pure minimalism
- Housing: 6063 aluminum and PC reflector



Recessed



UGR
<19



IP Rating
IP44


6 years
warranty

Standard Warranty





TRIAC Dimmable

TECHNICAL DATA SHEET - LIVA - 17966 - RECESSED LINEAR LIGHT

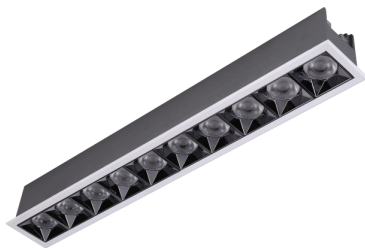

TECHNICAL DATA

Product Data	Recessed linear light
Lamp Type	OSRAM LED
Wattage	20W
Color Temperature	3000K
Rated Luminaire Luminous Flux	1400lm
Rated Luminaire Efficiency	70lm/W
IP Rating	44
Beam Angle	45°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>90
Power Factor	>0.95
Safety Class	Class III
Operating Temperature	-20°C ~ +40°C
SDCM(MacAdam)	< 3
Material	6063 Aluminum & PC reflector
Finish	White Ring, Black Reflector
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

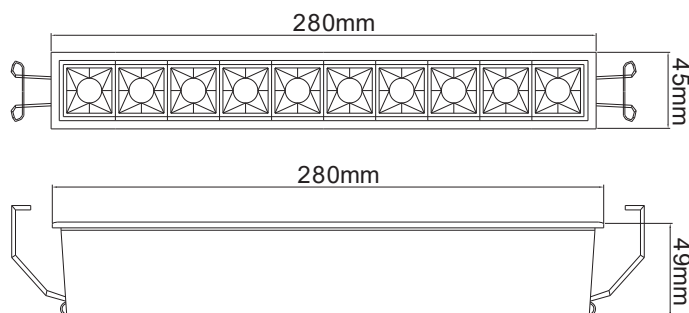

Cutout: 273x37mm

TECHNICAL OPTIONS

Wattage	2W/4W/10W/30W
Color Temperature	3000K-6000K
Beam Angle	15°/30°
Control	Switchable/DALI/1-10V/0-10V