

## Zozo Recessed Downlight



### Features

- IP65 Protection with super anti-glare Design, Triple anti-dazzle Design, Multiple Reflectors Optics optional
- Four size options 3" 4" 5" 6" 7"
- Wide mounting ring (10mm to 11mm)
- 100~140mm pre-wire

 **Recessed**

 **UGR**  
**<17**

 **IP Rating**  
**IP65**




**6** years  
warranty **Standard Warranty**

## TECHNICAL DATA SHEET - ZOZO - 18529 - RECESSED DOWNLIGHT



### TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	BRIDGELUX LED
Driver	TRIDONIC
Wattage	30W
Color Temperature	4000K
Rated Luminaire Luminous Flux	2,550lm
Rated Luminaire Efficiency	85lm/W
IP Rating	65
Beam Angle	55°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Safety Class	Class II
Output Current	850mA
THD	<20%
Operating Temperature	-20°C ~ +50°C
Storage Temperature	-30°C ~ +80°C
Material	Die Cast Aluminum
Finish	White Trim, Shining Silver Reflector
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

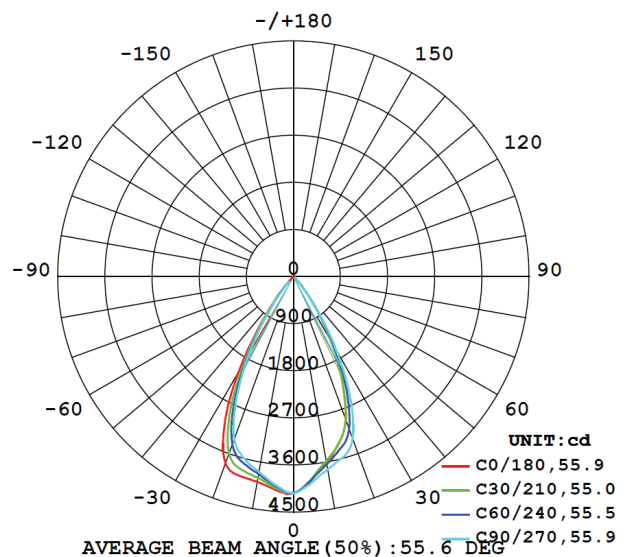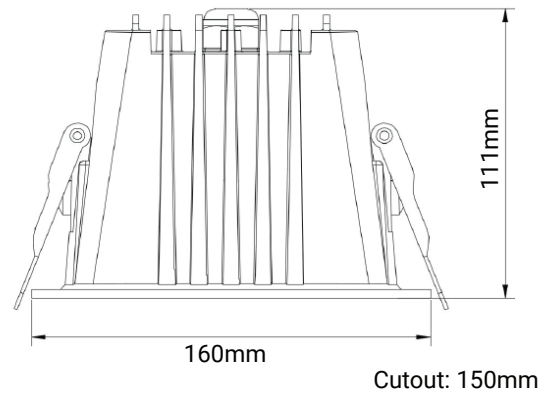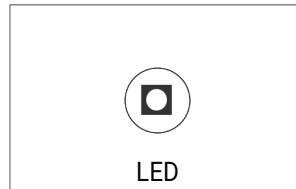

### TECHNICAL OPTIONS

Wattage	10W/12W/15W/20W/25W/35W/40W
Color Temperature	3000K-6000K
Beam Angle	24°
Control	Switchable/TRIAC/0-10V/DALI