

## Alan

### Area & Post-Top light



### Features

- Made of aluminum, Pole is made of iron.
- Diffuser: Polycarbonate
- Finish: Matt Black UV proof powder coating
- Without anchor bolts
- IP65 for the head.



**Installation**  
Street



**IK Rating**  
IK08



**IP Rating**  
IP66







**Standard Warranty**

## TECHNICAL DATA SHEET - ALAN - 19121 - AREA & POST-TOP LIGHT



### TECHNICAL DATA

|                                   |   |
|-----------------------------------|---|
| <b>Product Data</b>               | Area & Post-top                                     |
| <b>Lamp Type</b>                  | OSRAM LED   |
| <b>Driver</b>                     | Meanwell Driver                                     |
| <b>Wattage</b>                    | 45W   |
| <b>Color Temperature</b>          | 3000K   |
| <b>Rated Luminaire Efficiency</b> | 4500lm  |
| <b>Rated Luminaire Flux</b>       | 100lm/W   |
| <b>IP Rating</b>                  | 66  |
| <b>Voltage</b>                    | AC90-260V   |
| <b>Frequency Range</b>            | 50/60Hz   |
| <b>CRI</b>                        | Ra>80   |
| <b>Power Factor</b>               | >0.9  |
| <b>Operating Temperature</b>      | -20°C ~ +50°C                                       |
| <b>Output Current</b>             | 1500mA  |
| <b>Safety Class</b>               | Class I   |
| <b>IK Rating</b>                  | 08  |
| <b>Material</b>                   | Aluminium Body + Hot-dip galvanized iron pole       |
| <b>Finish</b>                     | Matt Black UV Proof powder coating                  |
| <b>Life Span</b>                  | 50,000 Hours  |
| <b>Warranty</b>                   | 5 Years   |
| <b>Applications</b>               | Outdoors, Residential, Commercial, Hospitality etc. |

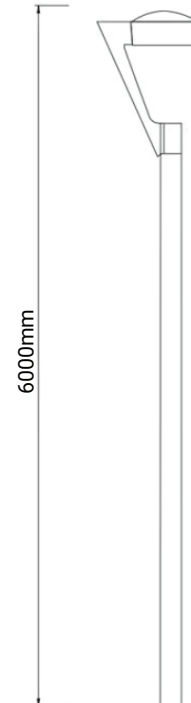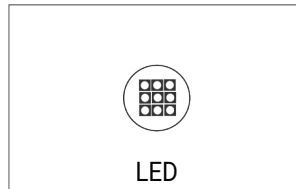

### TECHNICAL OPTIONS

|                          |                                       |
|--------------------------|---------------------------------------|
| <b>Color Temperature</b> | 3000K - 6000K                         |
| <b>Finish</b>            | Switchable, TRIAC, DALI, 0-10V, 1-10V |