

Amara Pendant Light



Features

- Amara creates extreme low heat and offers an excellent lumen performance
- Energy saving up to 85%, high efficiency power supply, low power consumption
- High value appearance and durability
- Easy to install



Installation
Pendant



UGR
<19



IP Rating
IP44

6
years
warranty



Standard Warranty

TECHNICAL DATA SHEET - AMARA - 19063 - PENDANT LIGHT



TECHNICAL DATA

Product Data	Pendant Light
Lamp Type	BRIDGELUX LED
Wattage	24W
Color Temperature	3000K/4000K/6000K
Rated Luminaire Luminous Flux	1920lm,2040lm,2160lm
Rated Luminaire Efficiency	80lm/W/85lm/W/90lm/W
IP Rating	44
Beam Angle	24°
Input Voltage	AC220-240V
Output Voltage	DC24-42V
Frequency Range	50-60 Hz
CRI	Ra>90
Power Factor	>0.5
Output Current	600mA
Safety Class	Class II
Operating temperature	-20°C ~ +40°C
SDCM	<3
Material	Die cast Aluminium+PC body
Finish	White+Black Reflector Cup
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Hospitality, Commercial, etc.

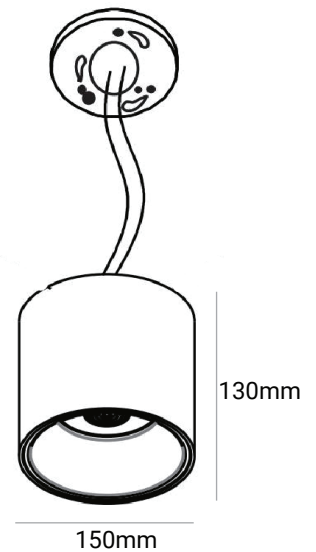

Cable Length = 1.5mtr

TECHNICAL OPTIONS

Wattage	12W
Beam Angle	36°
Finish	Black
Control	Switchable, TRIAC, 1-10V, DALI, 0-10V