



Product Specifications:

Lamp Type: OSRAM LED
 Operating Temp.: -20°C ~ +50°C
 Material: Hard chrome-plated stainless steel #316
 Finish: Chrome
 Gasket: : Silicone gasket
 Cable Gland: PG-11 copper with nickel-coated
 Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk
 Automatic Shutdown at 75°C
 Temperature of water between -20°C~+50°C less than 1 meter depth
 Lifespan: 50,000 Hrs
 Warranty: 5 Years
 Applications: Pools, Fountains








Product Options:

Wattage: 16W/20W
 CCT: 3000K - 6000K
 Voltage: DC12V
 Beam Angle: 20° / 25° / 35° / 45°
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

| | SKU | W | CCT | LM | mA | Beam | Size(mm) | Cut(mm) |
|------|-------|----|-------|-------|---------------------------------|------|----------|---------|
| Ello | 16516 | 8W | 3000K | 720lm | 371mA | 30° | D: 135 | - |
| | 16199 | 8W | RGB | 640lm | R: 200mA, G: 215mA, B: 215mA | 30° | D: 135 | - |

DC 24V IP 68  CRI>90


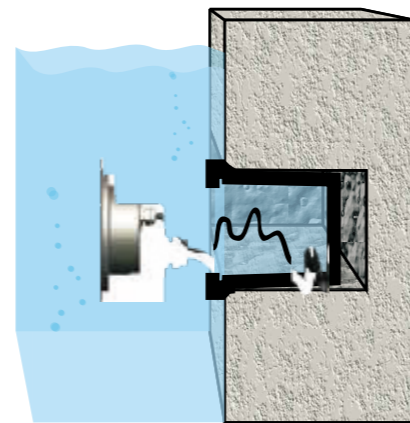


• Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

•Warning : Must be installed under the water to prevent the light from being burnt off because of over-heating.



Built-in Radiator

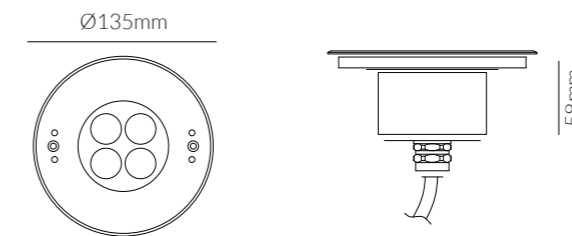

Mounting Sleeve 058

ELLO