

JABO

ECO-MIDI STREET LIGHT




Characteristics


- Housing is made of very anti corrosion resistant high pressure die-cast aluminium with polyester powder coated treatment.
- (NTC) Thermal management protect for LED module.
- Toughened glass with high light transmittance to optimize the light output ratio.
- Stainless steel bracket to secure the covering open position for maintenance.
- Integrated Surge protector (SPD) 10kV-10kA, type I / II, with LED signal and thermal fuse



Horizontal Installation

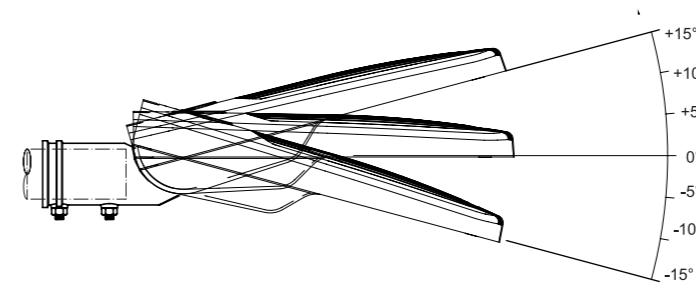

Post Top Installation

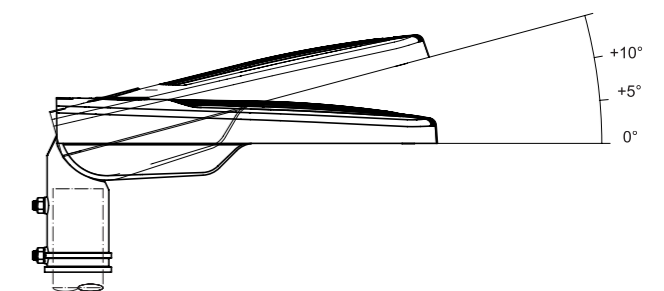

Product Specifications:


Lamp Type: CREELED
 Driver: PHILIPS Driver
 Installation Height: 6-14 M
 Operating Temp.: -20°C ~ +50°C
 Material: Die-cast aluminium+tempered glass
 Finish: Dark Grey
 Power Distribution: 2.5KV
 Lifespan: 50,000 Hrs
 Warranty: 5 Years
 Applications: Pools, Fountains



Product Options:

Wattage: 51W to 137W
 CCT: 3000K - 6000K
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM
 Mounting: Bracket or Post-top Ø60mm, Ø48mm (OPTIONAL) , Ø76mm (OPTIONAL)

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Jabo	16723	103W	4000K	12,875lm	700mA	-	702x314x130	-
	16724	135W	4000K	16875lm	700mA	-	702x314x130	-

AC220-240V IP 66  CRI>70 PF>0.9

