

## Ferrol

### Tubular Linear Light



### Features

- Ferrol is one of the most popular products of our architectural tubular lights family, thanks to the build-in reflector, it offers multiple beam angle options with UGR<16. Elegant design with premium functions provides comfortable lighting effect, and the tubular design presents esthetic itself. It's absolutely ideal solutions for the applications where requires comfortable optics such as office, library etc.



**IK Rating**  
IK10



**UGR**  
<16



**IP Rating**  
IP65

**5**  
years  
warranty

**Standard Warranty**

### Configuration



Pendant



Ceiling





Wall

## TECHNICAL DATA SHEET - FERROL - 19443 - TUBULAR LINEAR LIGHT



### TECHNICAL DATA

<b>Product Data</b>	Tubular Linear Light
<b>Lamp Type</b>	OSRAM LED
<b>Wattage</b>	36W
<b>Color Temperature</b>	4000K
<b>Rated Luminaire Luminous Flux</b>	4140lm
<b>Rated Luminaire Efficiency</b>	115lm/W
<b>Beam Angle</b>	50°
<b>IP Rating</b>	65
<b>Input Voltage</b>	AC220-240V
<b>Outout Voltage</b>	DC180-264V
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>80
<b>Power Factor</b>	>0.9
<b>SDCM (MacAdam)</b>	<3
<b>Safety Class</b>	Class I
<b>Operating Temperature</b>	-20 ~+50°C
<b>Material</b>	Extruded PC/Sheet metal board
<b>End Cap</b>	Stainless steel 316
<b>Finish</b>	Black
<b>Life Span</b>	50,000 Hours
<b>Warranty</b>	5 Years
<b>Applications</b>	Workspaces: offices, meeting rooms




### TECHNICAL OPTIONS


<b>Wattage</b>	48W
<b>CCT</b>	3000K - 6000K
<b>Beam Angle</b>	30° , 30x60°
<b>Finish</b>	Black
<b>Control</b>	0~10V, 1~10V, DALI, Microwave sensor

## TECHNICAL DATA SHEET - FERROL - 19443 - TUBULAR LINEAR LIGHT

### FEATURES

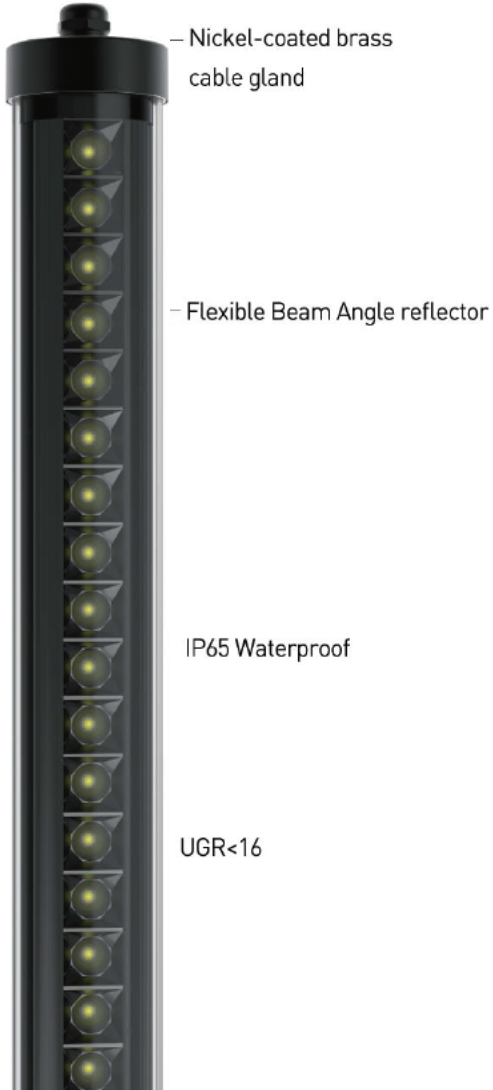

### PHOTOMETRICS

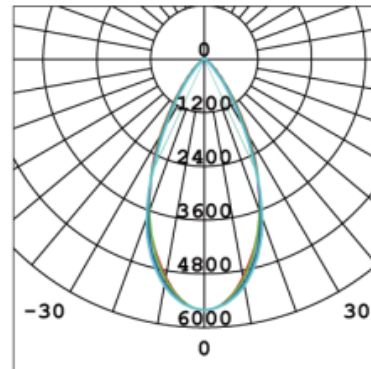

50°