


Ferrol

Tubular Linear Light

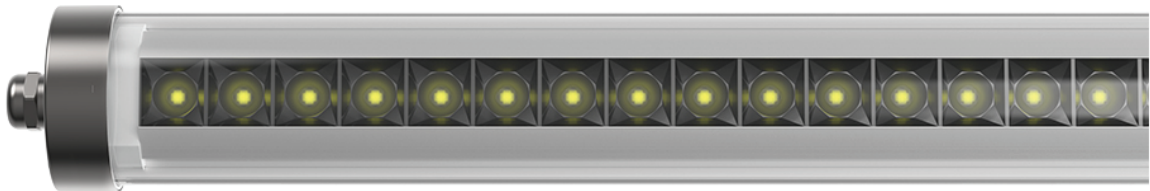

Features

- Ferrol is one of the most popular products of our architectural tubular lights family, thanks to the build-in reflector, it offers multiple beam angle options with UGR<16. Elegant design with premium functions provides comfortable lighting effect, and the tubular design presents esthetic itself. It's absolutely ideal solutions for the applications where requires comfortable optics such as office, library etc.



IK Rating
IK10



UGR
<16



IP Rating
IP65

5
years
warranty

Standard Warranty

Configuration



Pendant




Ceiling





Wall

TECHNICAL DATA SHEET - FERROL - 19444 - TUBULAR LINEAR LIGHT

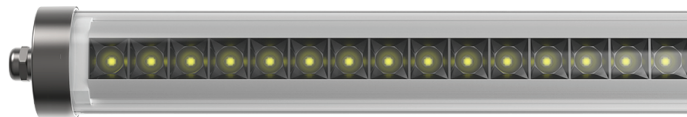

TECHNICAL DATA

Product Data	Tubular Linear Light
Lamp Type	OSRAM LED
Wattage	36W
Color Temperature	4000K
Rated Luminaire Luminous Flux	4140lm
Rated Luminaire Efficiency	115lm/W
Beam Angle	50°
IP Rating	65
Input Voltage	AC220-240V
Outout Voltage	DC180-264V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
SDCM (MacAdam)	<3
Safety Class	Class I
Operating Temperature	-20 ~+50°C
Material	Extruded PC/Sheet metal board
End Cap	Stainless steel 316
Finish	Silver
Life Span	50,000 Hours
Warranty	5 Years
Applications	Workspaces: offices, meeting rooms

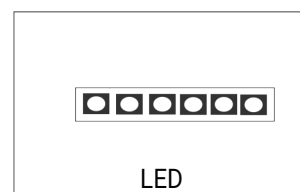

TECHNICAL OPTIONS

Wattage	48W
CCT	3000K - 6000K
Beam Angle	30° , 30x60°
Finish	Black
Control	0~10V, 1~10V, DALI, Microwave sensor

TECHNICAL DATA SHEET - FERROL - 19444 - TUBULAR LINEAR LIGHT

FEATUIRES




- Nickel-coated brass
cable gland

- Flexible Beam Angle reflector

IP65 Waterproof

UGR<16

PHOTOMETRICS

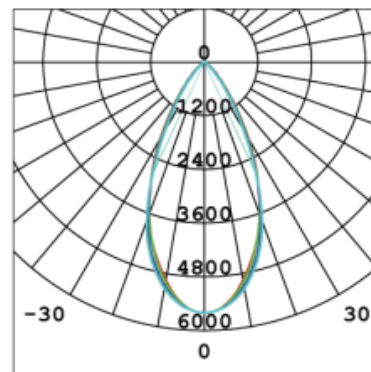

50°