



# Synergy™

## A Good Fit

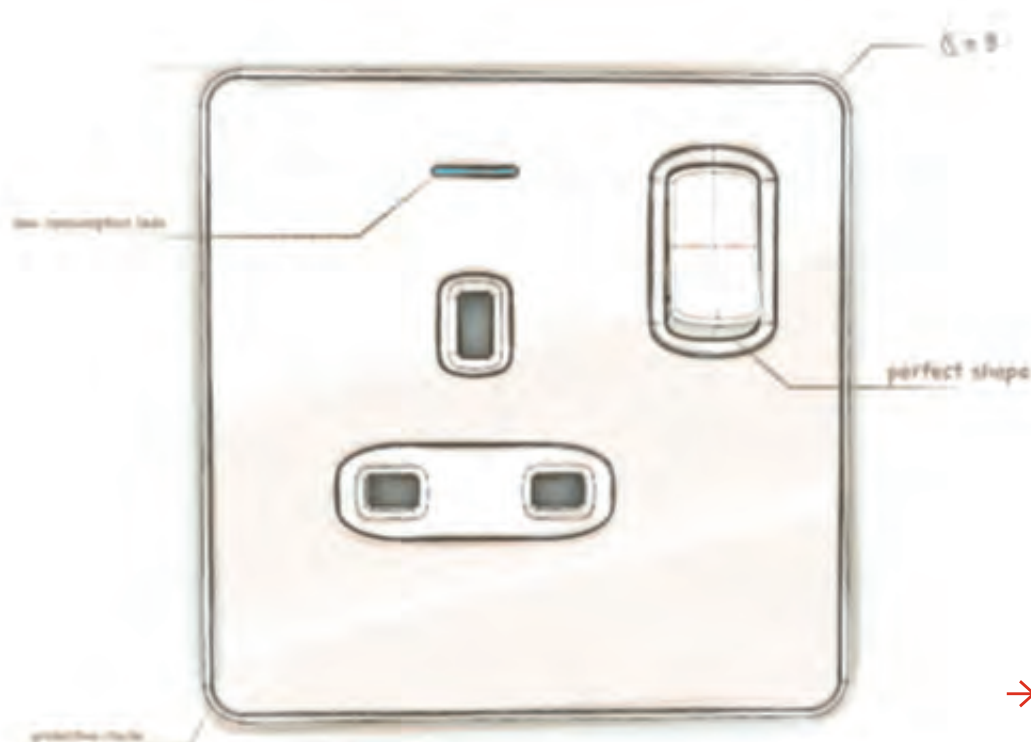

CATALOGUE  
PAGES  
→ INSIDE

# From designing the functions...

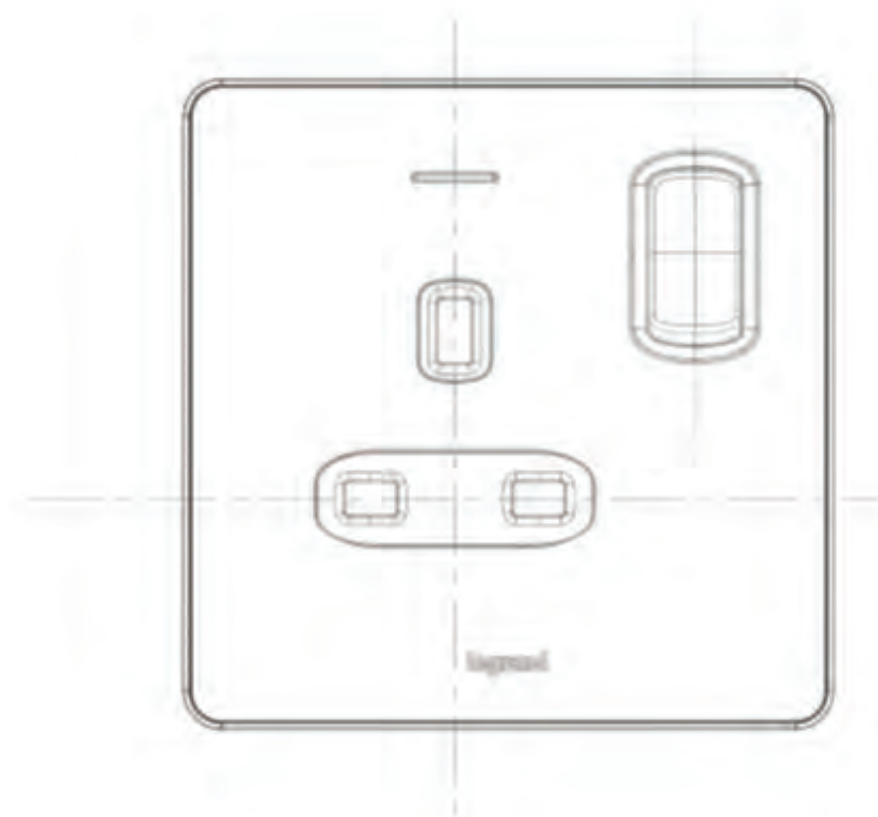

to specifying the  
finishes...



**Synergy**<sup>TM</sup>  
is a good fit – for you.



## Synergy™ Authentic



Authentic full metal appeal with proven technical quality places Synergy™ Authentic in a class of its own. Its full features and superior quality are truly authentic.

## Synergy™ Sleek Design



4 mm

Complementary slim profile and clean outline with no visible screws characterise Synergy™ Sleek Design. Cold and warm tones, glossy and brushed surfaces – three timeless metal finishes.

## Synergy™ Metalclad



Known for its durability and reliability, Synergy™ Metalclad is an all-weather series.

## Synergy™ White



Perfect harmony of form and function defines Synergy™ White. An all-purpose, all-time classic.

# Boasting a **Complete Range**

*White. Authentic. Sleek Design. Metalclad.*




Synergy™ is designed to fit your preferences right from its inception a decade ago. Today, Synergy™ renews its quality promise, enhances its features and elevates its functions to present you with four series that are carefully crafted and intricately modelled to suit any space, application and budget.

## Synergy™ Authentic

Featuring Grade 430 stainless steel for polished finishes and non magnetic Grade 304L stainless steel for the brushed finish, the Synergy™ Authentic range comes with additional surface treatment for rust resistance.



Quality you can rely on - Made in UK



### Brushed Stainless Steel

This series exudes understated elegance, adding personality to your installation.



### Glossy Gold Finishing

The shiny surface of the series makes it a looker. It brings cheer to any space.



### Polished Stainless Steel

This series enhances your project's character, without being over the top.

### Certified quality and safety

Synergy™ Authentic comprises a complete range, providing a solution for every important function you'll need.

The British standard sockets come with ASTA certification.



# Embodying Timeless Styles


*Full Metal. Sturdy. Reliable.*



Synergy™ Authentic embodies the familiar quality and stylish authenticity that everyone loves. Its full metal exteriors come complete with three distinctively different finishes – you are sure to find one that fits your style and demand for quality.

## Synergy™ Sleek Design

Inspired by modern electronic consumer devices, Synergy™ Sleek Design embodies a slim, compact form, a surface with smooth edges and no visible screws. And its specially designed cradle sits the product perfectly flat on the wall.




4 mm

### Brushed Stainless Steel

The warm metal tone of this series accentuates the sleekness of this range.

Quality you can rely on - Made in UK




4 mm

### Glossy Gold Finishing

This finish provides an opulent impression without compromising on functionality.

Special cradle for a flat fit on the wall



4 mm

### Polished Stainless Steel

The smooth surface enhances the uniqueness of the series.

Synergy™ Sleek Design presents a full series of functions that complement your every installation requirement.

The British standard sockets come with ASTA certification.





# And Exclusive Profiles

*Flat. Screwless. Sleek.*



Synergy™ Sleek Design comes in the same three beautiful finishes and is of the same high quality as Synergy™ Authentic. But Synergy™ Sleek Design has an exclusive profile and a stylised appearance emphasised by the absence of visible screws on the plate. Synergy™ Sleek Design is flat - and fit.



### USB Charger

The Synergy™ USB charger ensures that you can now conveniently charge your digital gadgets whenever you want. And it makes the need for an adaptor a thing of the past. Better still, it is low in energy consumption.



CFL



LED



Halogen



Incandescent

### Universal Dimmer

With the Universal Dimmer you always have the right choice: whether you need to dim incandescent or halogen lamps or to control dimmable CFLs and LEDs. This is one device that does it all - helping you to harness the full energy efficiency potential of modern loads.

Like all electronic functions of the Synergy range, the Universal Dimmers comply with EMC requirements.



### RCD Sockets

Our RCD sockets provide you with enhanced safety. Available in both ELO and ELR modes, the RCD sockets protect you against hazardous situations while keeping your important equipment running.

# Coupled with **Enduring Functions**

*USB Chargers. Universal Dimmers. RCD.Sockets.*



Synergy™ is a thoughtful range that goes beyond attending to your basic needs. Keeping in pace with your modern lifestyles, Synergy™ offers new functions so that your safety and energy efficiency goals are met. Synergy™ is a range you can count on to fit...you.

### Grid Plates - a perfect blend of style and versatility

Packing in up to 24 modules, Synergy™ Grid Plates satisfy your need for multiple functions. For seamless integration with Synergy™ Authentic and Sleek Design, switch modules are available in Brushed and Polished Stainless Steel, Glossy Gold, White and Anthracite. Grid plates come in all sizes from one to 24 gang.



### Front plates for Arteor mechanisms

Extending the spectrum of Synergy™ functions is now possible with these carrier plates. Simply match the plates with functions from the Arteor™ range.



# Suited for **Every Purpose**

*Multiple functions. Single control point.*



Synergy™ goes the distance with its complete range of Grid Plates. As a result, you can enjoy unrivalled versatility with no compromise on style. Whether it is to integrate switches with dimmers, TV or data sockets, Synergy™ responds to the challenge with fitting answers.



### Red/Green LED

The illuminated switches of Synergy™ White are a demonstration of perfect lithophane technique. LEDs are invisible unless activated, combining a low power consumption with sufficient brightness - all at once.



### Blue LED

The LED in the Synergy™ Authentic and Sleek Design collections enhances their technological appeal. Its low power consumption and long life make it particularly energy efficient.

Unique LED kits for location or power indication. Invisible until activated.




The blue LED is integrated into the surface, showcasing depth contrast.




### Optimised Wiring Space

Compact mechanism for maximum wiring space.

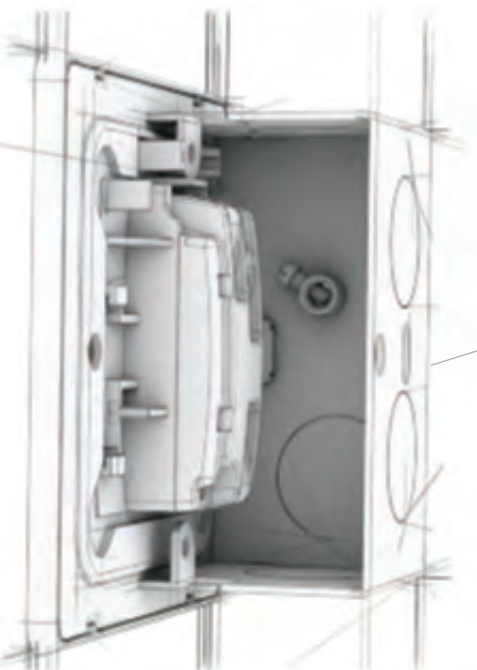

### Ease of Installation

Large angled easy-to-access cable entries and captive screws.

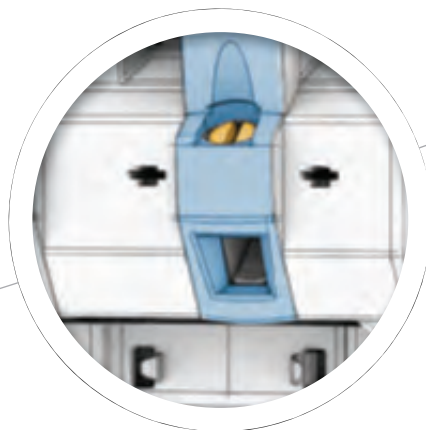


Strip length indicator - avoids waste of wires



# Complete with **Easy and Safe Handling**

*Compact. Simple. Safe.*

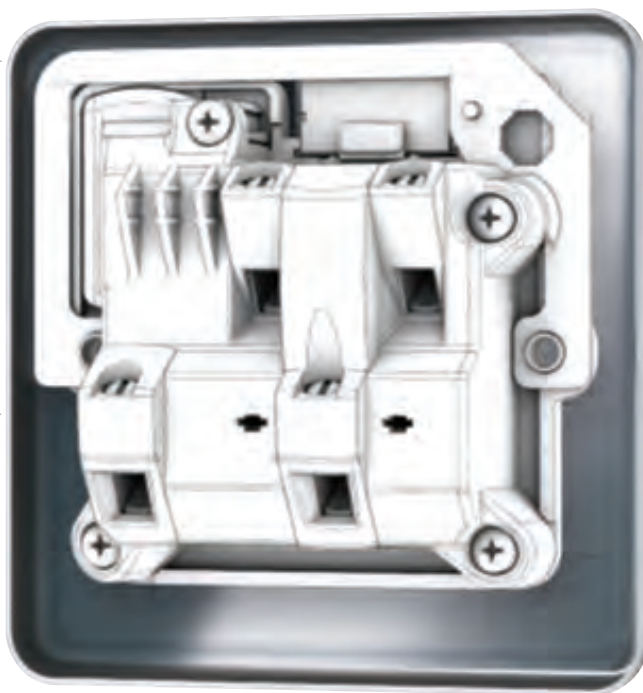

Synergy™ is more than just an aesthetically pleasing and functionally convenient range. The carefully engineered mechanism also makes this British standard monobloc range a breeze to install and handle. What's more? And the quality that is uniquely Synergy™ means installers can simply fit and forget.



Hotels

Offices



Homes


Institutions





# And Versatile Spatial Fit

*Homes. Offices. Hotels. Institutions.*

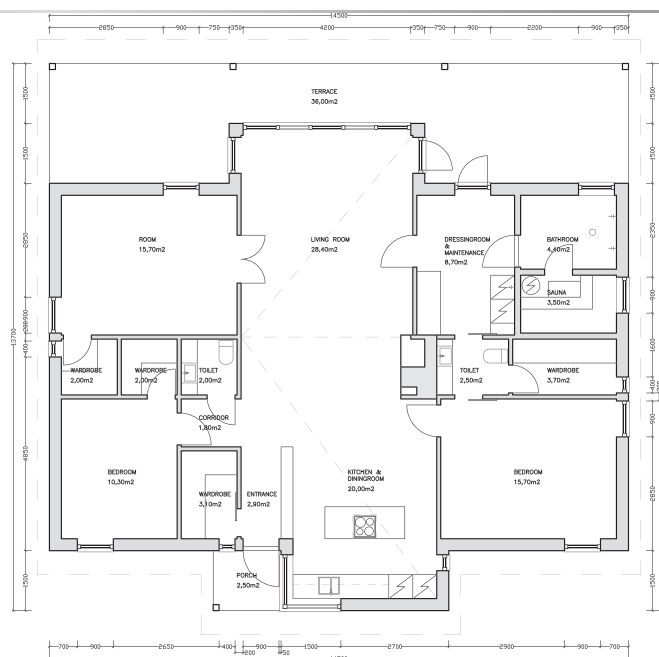

Synergy™ provides a comprehensive range that can complement any interior space and design. No matter whether your purpose is business, leisure or a combination of both, Synergy™ is your right fit – in every sense.

# Homes

Your home is your personal haven. That is why besides giving you visually pleasing switches, the Synergy™ range also heightens your comfort and safety with its full feature functions.



2 Gang Switched Socket with Indicator



Double Pole Switch



Universal Dimmer



1 Gang Switched Socket



Double USB Socket



# Offices

Your office is where you want to get things done. The clean, strong lines that personify the Synergy™ range make for less distraction so that you can focus on being productive.



2 Gang Switched Socket with Indicator



1 Gang Switch



1 Gang Switched Socket



RJ 45 Twin Socket



3 Gang - 2 Way Switch





# Hotels

Hotels are where you want to feel welcomed and pampered. With dedicated hotel-specific functions, the Synergy™ range promises a harmonious, complete experience. For installers this means – one range fits all.



Shaver Socket



Key Card Switch



3 Gang - 2 Way Switch



Hotel Call Indicator



2 Gang Switch



RJ 45 Twin Socket



# Institutions

Institutions appreciate practicality, robustness and effortless elegance. The Synergy™ collections stand for perfect synergy between proven quality and design excellence. Particularly, the Metalclad range provides for that much needed durability.



2 Gang Switched Socket with Indicator



1 Gang Switched Socket



RJ 45 Twin Socket



1 Gang - 1 Way Switch



3 Gang - 2 Way Switch







**Synergy™  
White**

**Synergy™  
Authentic**

**Synergy™  
Sleek Design**

**Synergy™  
Metalclad**



1 Gang Switch



1 Gang Switch



1 Gang Switch



1 Gang Switch



1 Gang Switched Socket



1 Gang Switched Socket



1 Gang Switched Socket



1 Gang Switched Socket



1 Gang 1000 W Dimmer



2 Gang Dimmer



Universal Dimmer



Fused Connection Unit



Data Socket



Data Socket



Data Socket



Data Socket



TV Antenna Socket



TV-R-SAT Socket



USB Charger



TV Antenna Socket



# It's Definitely An All-time Favourite

*Installers. Designers. Users.*



Synergy™ is well liked for its quality, its features and its functions. Today, a decade on, we renew our quality promise and present Synergy™ with enhanced features and elevated functions. Although times may have changed and needs may have become more complex, there is no doubt that Synergy™ continues to be a good fit.



# CATALOGUE Contents

23-27	Synergy™ <b>White</b>	
28-33	Synergy™ <b>Authentic</b>	
34-39	Synergy™ <b>Sleek Design</b>	
40-41	Synergy™ <b>Metalclad</b>	
42-43	Synergy™ <b>Grid Modules</b>	
44-45	Selection Chart Grid Modules	
46	Selection Chart Front Plates for Arteor mechanisms	
47-48	Catalogue Number Index	



# Synergy™

## single pole switches, single pole push and key switches, rotary dimmers - white



7 300 00



7 300 06



7 311 51



7 301 56

Front plates: white thermoset. Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Compact mechanism for maximised wiring space. Supplied with faceplate screw caps

Pack	Cat.Nos	Single pole plate switches 10 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep ASTA licence
		<b>Nominal plate dimensions: 86 x 86 mm</b>
10	7 300 00	1 gang - 1 way
10	7 300 01	1 gang - 2 way
10	7 300 05	1 gang - intermediate
10	7 300 24	2 gang - 1 way
10	7 300 02	2 gang - 2 way
10	7 301 24	3 gang - 1 way
10	7 300 03	3 gang - 2 way
		<b>Nominal plate dimensions: 86 x 146 mm</b>
5	7 300 04	4 gang - 2 way
5	7 300 06	6 gang - 2 way

Pack	Cat.Nos	Single pole plate switches 20 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep Nominal plate dimensions: 86 x 86 mm
10	7 301 30	1 gang - 1 way
10	7 301 31	1 gang - 2 way
10	7 301 34	2 gang - 1 way
10	7 301 32	2 gang - 2 way
10	7 301 35	3 gang - 1 way
10	7 301 33	3 gang - 2 way

Pack	Cat.Nos	Single pole push switches 10 A - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep ASTA licence
		<b>Nominal plate dimensions: 86 x 86 mm</b>
5	7 300 07	1 gang - 2 way push switch
5	7 300 11	1 gang - 2 way push switch marked "PRESS"
5	7 301 07	1 gang - 2 way push switch with bell symbol

Pack	Cat.Nos	Single pole key switch 10 AX - 250 V~
		Conform to BS EN 60669-1: 2000 Key supplied. For flush-mounting, back box to be min. 16 mm deep. Nominal plate dimensions: 86 x 86 mm
10	7 300 08	1 gang - 2 way

Pack	Cat.Nos	3 pole fan switch 10 A - 250 V~
		Conform to BS EN 60669-1: 2000 With integrated padlockable safety block in OFF position. Flush-mounting back box: min 25 mm deep Nominal plate dimensions: 86 x 86 mm
10	7 300 09	3 pole fan switch
Pack	Cat.Nos	Push on/off rotary universal dimmer 5 W/300 W 100 - 240 V~ - 50/60 Hz
		Conform to IEC 60669-2-1 For flush-mounting back box to be min. 40 mm deep Equipped with overvoltage and short-circuit protection Screw terminals. For all types of lamps: - dimmable LEDs: 5 W to 75 W - dimmable compact fluorescent lamps: 5 W to 75 W - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V: 5 W to 300 W When switched on, gradually (2 seconds) lights up at the level set before last switch-off Nominal plate dimensions: 86 x 86 mm
1	7 311 51	1 gang

Pack	Cat.Nos	Push on/off rotary dimmers 400 W 100 - 240 V~ - 50/60 Hz
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep <b>Nominal plate dimensions: 86 x 86 mm</b>
1	7 301 56	1 gang - 2 way
1	7 301 57	2 gang - 2 way
		<b>Nominal plate dimensions: 86 x 146 mm</b>
1	7 300 49	4 gang - 2 way

Pack	Cat.Nos	Push on/off rotary dimmer 1000 W 100-240 V/50-60 Hz
		Conform to BS EN 60669-1 For flush-mounting back box to be min. 40 mm deep - 60-1000 W (230 V) - 60-500 W (127 V) for incandescent and halogen lamps 60-600 VA (230 V) - 60-300 VA (127 V) for halogen lamps with electronic transformers 60-100 VA (230 V) - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Nominal plate dimensions: 86 x 86 mm
1	7 301 50	1 gang



Surface mounting boxes,  
p. 27



## Synergy™

### double pole switches - white



7 301 10



7 300 22

Front plates: white thermoset  
Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Compact mechanism for maximised wiring space  
Supplied with faceplate screw caps

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	7 300 10	Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep Use cord outlet accessory box Cat.No 7 300 53 for external cord outlet ASTA licence Nominal plate dimensions: 86 x 86 mm DP switch
10	7 300 12	DP switch + red LED power indicator LED invisible until activated
10	7 301 10	DP switch marked "WATER HEATER"
10	7 301 12	DP switch marked "WATER HEATER" + red LED power indicator LED invisible until activated

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
10	7 300 22	Conform to BS EN 60669-1 ASTA licence For flush-mounting, back box to be min. 45 mm deep <b>Nominal plate dimensions: 86 x 86 mm</b> DP switch
10	7 300 23	DP switch + red LED power indicator LED invisible until activated
10	7 301 22	DP switch red rocker marked "COOKER"
5	7 300 20	<b>Nominal plate dimensions: 146 x 86 mm</b> DP switch
5	7 300 21	DP switch + red LED power indicator LED invisible until activated
5	7 301 20	DP switch red rocker marked "COOKER"

## Synergy™

### telephone, data and TV sockets - white



7 300 50



7 300 57



7 300 43

Front plates: white thermoset  
Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Compact mechanism for maximised wiring space  
Supplied with faceplate screw caps

Pack	Cat.Nos	Euro module front plates
10	7 300 99	Suitable for use with standard 25 x 50 mm Euro data module inserts 1 gang - 86 x 86 mm 2 modules - aperture size 50 x 50 mm
10	7 301 00	2 gang - 86 x 146 mm 4 modules - aperture size 50 x 100 mm
Pack	Cat.Nos	Telephone sockets
10	7 300 50	For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm UK master
10	7 300 51	UK secondary
10	7 300 54	RJ 11/RJ 12 - single
Pack	Cat.Nos	Data sockets - Cat. 6
1	7 300 56	Rapid cable connection For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm RJ 45 - single
1	7 300 57	RJ 45 - twin
Pack	Cat.Nos	Television sockets
10	7 300 40	For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm Screened TV socket single - male
10	7 301 40	Screened TV socket single - female
10	7 301 44	Screened TV socket single pass through - female
10	7 301 45	Screened TV socket single terminal - female
1	7 300 41	SAT socket single - "F" type
1	<b>AVAILABLE SEPT 2016 7 301 41</b>	TV-SAT socket
1	7 300 43	TV-R-SAT socket "F" type

# Synergy™

## British standard socket outlets and RCD sockets - white



7 300 65



7 300 60



7 300 70



6 781 33



6 781 38

Front plates: white thermoset  
Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Compact mechanism for maximised wiring space  
Supplied with faceplate screw caps

Pack	Cat.Nos	Socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2 With safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep ASTA licence
10	7 300 65	<b>Unswitched</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 75	2 gang Nominal plate dimensions: 86 x 146 mm
10	7 300 66	<b>Single pole - switched</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 76	2 gang Nominal plate dimensions: 86 x 146 mm
		<b>Socket outlets 13 A - 250 V~ Special earth pin</b>
		With safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep
10	7 300 67	<b>Double pole - switched</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 77	2 gang Nominal plate dimensions: 86 x 146 mm
		<b>Double pole socket outlets 13 A - 250 V~</b>
		Conform to BS 1363: Part. 2 With safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep ASTA licence
10	7 300 60	<b>Switched</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 70	2 gang Nominal plate dimensions: 86 x 146 mm
10	7 300 61	<b>Switched with red LED power indicator</b> LED invisible until activated 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 71	2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Double pole socket outlets 13 A - 250 V~ (continued)
		Conform to BS 1363: Part. 2 With safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep ASTA licence
10	7 300 64	<b>Switched for standard and clean earth applications</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 74	2 gang Nominal plate dimensions: 86 x 146 mm
10	7 301 62	<b>Switched with red rocker</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 301 61	2 gang Nominal plate dimensions: 86 x 146 mm
		<b>RCD sockets 13 A - 250 V~</b>
		Conform to BS 7288: 1990 and BS 1363 - Part 2: 1995 Conventional earth pin release shutter Maximum operating current 16 A Electronic RCD module with a membrane switch for "test and reset" Flush mounting back box : min. 25 mm deep
		<b>ELO - DP 30 mA</b> Trips in the event of a power failure Ideal for applications where it is desirable to prevent automatic reactivation of equipment after a power failure For hazardous, e.g. machinery, power tools
1	6 781 33	1 gang Nominal plate dimensions: 86 x 86 mm
1	6 781 37	2 gang Nominal plate dimensions: 86 x 146 mm
		<b>ELR - DP 30 mA</b> Trips in the event of a power failure Ideal for applications where it is desirable to automatically re-activate equipment after a power failure E.g. fridge, freezer, unmanned areas
1	6 781 34	1 gang Nominal plate dimensions: 86 x 86 mm
1	6 781 38	2 gang Nominal plate dimensions: 86 x 146 mm

## Synergy™

### British standard socket outlets - white (continued)



7 300 89



7 300 69

Front plates: white thermoset  
Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Compact mechanism for maximised wiring space  
Supplied with faceplate screw caps

Pack	Cat.Nos	Socket outlets 15 A - 250 V~
10	7 300 88	Conform to BS 546 Patented 3 pin safety shutter mechanism For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched
10	7 300 89	1 gang - switched, single pole
5	7 300 85	Standard terminal screws For flush-mounting, back box to be min. 35 mm deep 1 gang unswitched Nominal plate dimensions: 86 x 86 mm
5	7 300 86	2 gang unswitched Nominal plate dimensions: 86 x 146 mm
10	7 300 68	Conform to BS 546 Patented 3 pin safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched
10	7 300 69	1 gang - switched, single pole
10	7 300 59	Conform to BS 546 For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched

## Synergy™

### Euro-US socket outlets and shaver socket - white



7 300 84



7 300 83

Front plates: white thermoset  
Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Compact mechanism for maximised wiring space  
Supplied with faceplate screw caps

Pack	Cat.Nos	Socket outlet combined UK / Euro - US 13 A - 10/16 A
10	7 300 84	For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched UK - 13 A / EURO-US - 10/16 A - 250 V~
10	7 300 80	Euro - US socket outlets For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 10 A - 127 V~ 16 A - 250 V~ 1 gang - unswitched
10	7 300 81	2 gang - unswitched
10	7 300 82	1 gang - switched
10	7 300 83	1 gang - unswitched + 10 AX 1 way switch
1	7 300 90	Shaver socket Conform to BS EN 61558-2-5 Suitable for use with European, British and Australian 2 pin plugs Rating: 20 VA IP 24 Screwless live and neutral terminals For flush-mounting, back box to be min. 45 mm deep Nominal plate dimensions: 146 x 86 mm 230 V - 120 V~ - 50/60 Hz

## Synergy™ – cooker control units, fused connection units and cable outlets - white



7 300 29



7 300 26

Front plates: white thermoset  
Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Compact mechanism for maximised wiring space  
Supplied with faceplate screw caps

Pack	Cat.Nos	Cooker control units 250 V~
5	7 300 28	Conform to BS 4177 For flush-mounting, back box to be min. 45 mm deep Nominal plate dimensions: 86 x 146 mm 45 A DP switch + 13 A DP switched socket outlet
5	7 300 29	45 A DP switch + 13 A DP switched socket outlet + red LED power indicator LED invisible until activated

Pack	Cat.Nos	Fused connection units 13 A - 250 V~
10	7 300 32	Conform to BS 1363: Part 4 Fused 13 A (fuse supplied) Front cable outlet with cord grip Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm <b>Unswitched</b> With cord outlet
10	7 300 33	With red LED power indicator LED invisible until activated
10	7 300 36	<b>Double pole switched</b> With cord outlet
10	7 300 37	With red LED power indicator and cord outlet LED invisible until activated

Pack	Cat.Nos	Cable outlets
10	7 300 19	Conform to BS 5733 Fitted with cable clamp and outlet membrane Nominal plate dimensions: 86 x 86 mm <b>20 A - 250 V~</b> For flush-mounting, back box to be min. 35 mm deep With terminal block
5	7 300 26	<b>45 A - 250 V~</b> For flush-mounting, back box to be min. 45 mm deep With terminal block

## Synergy™ – blanking plates, accessories and surface mounting boxes - white



7 300 96



7 301 58



7 364 06



7 364 11

Pack	Cat.Nos	Blanking plates
10	7 300 95	1 gang Nominal plate dimensions: 86 x 86 mm
10	7 300 96	2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Accessories
10	7 301 58	<b>Electronic LED</b> All relevant Synergy white functions are designed to accept the LED packs for fitting at time of installation or retrospectively by a qualified person Can be used with fluorescent light Electronic LED locator pack green diodes: max. current 0.2 mA provides illumination for function (e.g. switch) location in low light
10	7 300 58	Electronic LED power indicator pack red diodes: nominal current 2 mA provides indication of "power on" condition in such functions as sockets and control switches
10	7 300 53	<b>Cord outlet</b> 1 gang box Nominal plate dimensions: 86 x 86 mm

Pack	Cat.Nos	Surface-mounting moulded boxes
10	7 364 06	1 gang, 35 mm deep 86 x 86 mm
10	7 364 07	1 gang, 50 mm deep and cable grip 86 x 86 mm
5	7 364 10	2 gang, 35 mm deep 86 x 146 mm
5	7 364 11	2 gang, 50 mm deep and cable grip 86 x 146 mm
5	7 364 13	2 x 1 gang, 35 mm deep 86 x 172 mm





8 330 00



8 332 02



8 334 03



8 331 51



8 333 57

Slim front plate:

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries. Compact mechanism for maximum wiring space

Pack	Cat.Nos	Single pole plate switches 10 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep
1	8 330 00	<b>1 gang - 1-way switch</b> Nominal plate dimensions: 86 x 86 mm
1	8 332 00	● Brushed stainless steel
1	8 334 00	● Polished stainless steel
		● Glossy gold
1	8 330 01	<b>1 gang - 2-way switch</b> Nominal plate dimensions: 86 x 86 mm
1	8 332 01	● Brushed stainless steel
1	8 334 01	● Polished stainless steel
		● Glossy gold
1	8 330 05	<b>1 gang - intermediate switch</b> Nominal plate dimensions: 86 x 86 mm
1	8 332 05	● Brushed stainless steel
1	8 334 05	● Polished stainless steel
		● Glossy gold
1	8 330 02	<b>2 gang - 2-way switch</b> Nominal plate dimensions: 86 x 86 mm
1	8 332 02	● Brushed stainless steel
1	8 334 02	● Polished stainless steel
		● Glossy gold
1	8 330 03	<b>3 gang - 2-way switch</b> Nominal plate dimensions: 86 x 86 mm
1	8 332 03	● Brushed stainless steel
1	8 334 03	● Polished stainless steel
		● Glossy gold
1	8 330 04	<b>4 gang - 2-way switch</b> Nominal plate dimensions: 86 x 146 mm
1	8 332 04	● Brushed stainless steel
1	8 334 04	● Polished stainless steel
		● Glossy gold

Pack	Cat.Nos	Single pole push switches 10 A - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 330 07	<b>1 gang - 2-way push switch</b>
1	8 332 07	● Brushed stainless steel
1	8 334 07	● Polished stainless steel
		● Glossy gold

Pack	Cat.Nos	Single pole plate switches 20 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 331 31	<b>1 gang - 2-way switch</b>
1	8 333 31	● Brushed stainless steel
1	8 335 31	● Polished stainless steel
		● Glossy gold

Pack	Cat.Nos	Single pole plate switches 20 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 331 32	<b>2 gang - 2-way switch</b>
1	8 333 32	● Brushed stainless steel
1	8 335 32	● Polished stainless steel
		● Glossy gold
1	8 331 33	<b>3 gang - 2-way switch</b>
1	8 333 33	● Brushed stainless steel
1	8 335 33	● Polished stainless steel
		● Glossy gold
		<b>Push on/off rotary universal dimmer 5 W/300 W</b>
		<b>1 gang</b> Conform to IEC 60669-2-1 For flush mounting back box to be min. 40 mm deep Equipped with overvoltage and short-circuit protection Screw terminals. For all types of lamps: - dimmable LEDs: 5 W to 75 W - dimmable compact fluorescent lamps: 5 W to 75 W - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V: 5 W to 300 W When switched on, gradually (2 seconds) lights up at the level set before last switch-off Nominal plate dimensions: 86 x 86 mm
1	8 331 51	● Brushed stainless steel
1	8 333 51	● Polished stainless steel
1	8 335 51	● Glossy gold

Pack	Cat.Nos	Push on/off rotary dimmer 400 W 100-240 V~ - 50/60 Hz
		Conform to BS EN 60669-1-2 For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 331 56	<b>1 gang - 2 way</b>
1	8 333 56	● Brushed stainless steel
1	8 335 56	● Polished stainless steel
		● Glossy gold
1	8 331 57	<b>2 gang - 2 way</b>
1	8 333 57	● Brushed stainless steel
1	8 335 57	● Polished stainless steel
		● Glossy gold

Pack	Cat.Nos	Push on/off rotary dimmer 1000 W 100-240 V/50-60 Hz
		Conform to BS EN 60669-1 - For flush-mounting back box to be min. 40 mm deep - 60-1000 W (230 V) - 60-500 W (127 V) for incandescent and halogen lamps 60-600 VA (230 V) - 60-300 VA (127 V) for halogen lamps with electronic transformers 60-100 VA (230 V) - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Nominal plate dimensions: 86 x 86 mm
1	8 331 50	<b>1 gang</b>
1	8 333 50	● Brushed stainless steel
1	8 335 50	● Polished stainless steel
		● Glossy gold



Slim front plate:

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	<b>3 pole fan switch 10 A - 250 V~</b>
		Conform to BS EN 60669-1: 2000 With integrated padlockable safety block in OFF position. Flush mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 330 09	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 332 09	
1	8 334 09	
		<b>Double pole switches 20 A - 250 V~</b>
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep Use cord outlet accessory Cat.No 7 300 53 for external cord outlet Nominal plate dimensions: 86 x 86 mm
		<b>DP switch</b>
1	8 330 10	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 332 10	
1	8 334 10	
		<b>DP switch + cord outlet + blue LED power indicator</b>
1	8 330 16	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 332 16	
1	8 334 16	
		<b>DP switch + blue LED power indicator</b>
1	8 330 12	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 332 12	
1	8 334 12	

Pack	Cat.Nos	<b>Double pole switches 45 A - 250 V~</b>
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 45 mm deep
		<b>1 gang switch</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 22	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 332 22	
1	8 334 22	
		<b>1 gang switch + blue LED power indicator</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 23	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 332 23	
1	8 334 23	
		<b>1 gang switch + blue LED power indicator large plate</b>
		Nominal plate dimensions: 146 x 86 mm
1	8 330 21	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 332 21	
1	8 334 21	



Slim front plate:

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	<b>Telephone sockets</b>
		For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
		<b>UK master</b>
1	8 330 50	● Brushed stainless steel
1	8 332 50	● Polished stainless steel
1	8 334 50	● Glossy gold
		<b>UK secondary</b>
1	8 330 51	● Brushed stainless steel
1	8 332 51	● Polished stainless steel
1	8 334 51	● Glossy gold
		<b>RJ 11/RJ 12 - single</b>
1	8 330 54	● Brushed stainless steel
1	8 332 54	● Polished stainless steel
1	8 334 54	● Glossy gold
		<b>Data sockets Cat. 6</b>
		Rapid cable connection For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
		<b>RJ 45 - single</b>
1	8 330 56	● Brushed stainless steel
1	8 332 56	● Polished stainless steel
1	8 334 56	● Glossy gold
		<b>RJ 45 - twin</b>
1	8 330 57	● Brushed stainless steel
1	8 332 57	● Polished stainless steel
1	8 334 57	● Glossy gold

Pack	Cat.Nos	<b>Television sockets</b>
		For flush-mounting, back box to be min. 35 mm deep Screened Nominal plate dimensions: 86 x 86 mm
		<b>TV socket - single male</b>
1	8 330 40	● Brushed stainless steel
1	8 332 40	● Polished stainless steel
1	8 334 40	● Glossy gold
		<b>SAT socket - single "F" type</b>
1	8 330 41	● Brushed stainless steel
1	8 332 41	● Polished stainless steel
1	8 334 41	● Glossy gold
		<b>TV-R-SAT socket - "F" type</b>
1	8 330 43	● Brushed stainless steel
1	8 332 43	● Polished stainless steel
1	8 334 43	● Glossy gold





8 330 65



8 332 75



8 334 67



8 330 60



8 332 71

Slim front plate:

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	Socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2. With safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep ASTA licence
		<b>1 gang unswitched</b> Nominal plate dimensions: 86 x 86 mm
1	8 330 65	● Brushed stainless steel
1	8 332 65	● Polished stainless steel
1	8 334 65	● Glossy gold
		<b>2 gang unswitched</b> Nominal plate dimensions: 86 x 146 mm
1	8 330 75	● Brushed stainless steel
1	8 332 75	● Polished stainless steel
1	8 334 75	● Glossy gold

Pack	Cat.Nos	Single pole socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2. With safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep ASTA licence
		<b>1 gang switched</b> Nominal plate dimensions: 86 x 86 mm
1	8 330 66	● Brushed stainless steel
1	8 332 66	● Polished stainless steel
1	8 334 66	● Glossy gold
		<b>1 gang switched with blue LED power indicator</b> Nominal plate dimensions: 86 x 86 mm
1	8 330 67	● Brushed stainless steel
1	8 332 67	● Polished stainless steel
1	8 334 67	● Glossy gold
		<b>2 gang switched</b> Nominal plate dimensions: 86 x 146 mm
1	8 330 76	● Brushed stainless steel
1	8 332 76	● Polished stainless steel
1	8 334 76	● Glossy gold
		<b>2 gang switched with blue LED power indicator</b> Nominal plate dimensions: 86 x 146 mm
1	8 330 77	● Brushed stainless steel
1	8 332 77	● Polished stainless steel
1	8 334 77	● Glossy gold

Pack	Cat.Nos	Double pole socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2. With safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep ASTA licence
		<b>1 gang switched</b> Nominal plate dimensions: 86 x 86 mm
1	8 330 60	● Brushed stainless steel
1	8 332 60	● Polished stainless steel
1	8 334 60	● Glossy gold
		<b>1 gang switched with blue LED power indicator</b> Nominal plate dimensions: 86 x 86 mm
1	8 330 61	● Brushed stainless steel
1	8 332 61	● Polished stainless steel
1	8 334 61	● Glossy gold
		<b>2 gang switched</b> Nominal plate dimensions: 86 x 146 mm
1	8 330 70	● Brushed stainless steel
1	8 332 70	● Polished stainless steel
1	8 334 70	● Glossy gold
		<b>2 gang switched with blue LED power indicator</b> Nominal plate dimensions: 86 x 146 mm
1	8 330 71	● Brushed stainless steel
1	8 332 71	● Polished stainless steel
1	8 334 71	● Glossy gold
		<b>2 gang switched outboard for standard and clean earth applications</b> Nominal plate dimensions: 86 x 146 mm
1	8 330 74	● Brushed stainless steel
1	8 332 74	● Polished stainless steel
1	8 334 74	● Glossy gold



8 332 97



8 334 89



8 330 69



8 332 59



8 330 44

Slim front plate:

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	<b>RCD sockets 13 A - 250 V~</b>
		Conform to BS 7288: 1990 and BS 1363 - Part 2: 1995 Conventional earth pin release shutter Maximum operating current 16 A Electronic RCD module with a membrane switch for "test and reset" Flush mounting back box : min. 25 mm deep
		<b>ELO - DP 30 mA</b> Trips in the event of a power failure Ideal for applications where it is desirable to prevent automatic reactivation of equipment after a power failure. For hazardous, e.g. machinery, power tools
1	<b>AVAILABLE JULY 2016</b> 8 330 85	1 gang - Nominal plate dimensions: 86 x 86 mm
1	8 332 85	● Brushed stainless steel
1	8 334 85	● Polished stainless steel
		● Glossy gold
1	8 330 97	2 gang - Nominal plate dimensions: 86 x 146 mm
1	8 332 97	● Brushed stainless steel
1	8 334 97	● Polished stainless steel
		● Glossy gold
		<b>ELR - DP 30 mA</b> Trips in the event of a power failure Ideal for applications where it is desirable to automatically re-activate equipment after a power failure. E.g. fridge, freezer, unmanned areas
1	<b>AVAILABLE JULY 2016</b> 8 330 86	1 gang - Nominal plate dimensions: 86 x 86 mm
1	8 332 86	● Brushed stainless steel
1	8 334 86	● Polished stainless steel
		● Glossy gold
1	8 330 98	2 gang - Nominal plate dimensions: 86 x 146 mm
1	8 332 98	● Brushed stainless steel
1	8 334 98	● Polished stainless steel
		● Glossy gold

Pack	Cat.Nos	<b>Socket outlets 15 A - 250 V~</b>
		Conform to BS 546 Patented 3 pin safety shutter mechanism, For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 330 88	1 gang unswitched
1	8 332 88	● Brushed stainless steel
1	8 334 88	● Polished stainless steel
		● Glossy gold
1	8 330 89	1 gang switched - single pole
1	8 332 89	● Brushed stainless steel
1	8 334 89	● Polished stainless steel
		● Glossy gold

Pack	Cat.Nos	<b>Socket outlets 15 A - 127 V~</b>
		For flush-mounting, back box to be min. 35 mm deep
1	8 330 99	1 gang
1	8 334 99	Nominal plate dimensions: 86 x 86 mm
1	8 333 99	● Brushed stainless steel
		● Polished stainless steel
		● Glossy gold
1	8 332 99	2 gang
1	8 331 99	Nominal plate dimensions: 86 x 146 mm
1	8 335 99	● Brushed stainless steel
		● Polished stainless steel
		● Glossy gold
		<b>Socket outlets 5 A - 250 V~</b>
		Conform to BS 546 Patented 3 pin safety shutter mechanism, For flush-mounting, back box to be min. 25 mm deep
1	8 330 68	1 gang unswitched
1	8 332 68	Nominal plate dimensions: 86 x 86 mm
1	8 334 68	● Brushed stainless steel
		● Polished stainless steel
		● Glossy gold
1	8 330 69	1 gang switched - single pole
1	8 332 69	Nominal plate dimensions: 86 x 146 mm
1	8 334 69	● Brushed stainless steel
		● Polished stainless steel
		● Glossy gold

Pack	Cat.Nos	<b>Socket outlets 2 A - 250 V~</b>
		Conform to BS 546 For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 330 59	1 gang unswitched
1	8 332 59	Nominal plate dimensions: 86 x 86 mm
1	8 334 59	● Brushed stainless steel
		● Polished stainless steel
		● Glossy gold
		<b>Double USB sockets</b>
		For flush-mounting, back box to be min. 40 mm deep Input voltage: 110 V/ 230 V Comply with IEC 62684 5 V (output) - 2400 mA Wiring with 1.5 Sq.mm and 2.5 Sq.mm (only live and neutral)
1	8 330 44	1 gang
1	8 332 44	Nominal plate dimensions: 86 x 86 mm
1	8 334 44	● Brushed stainless steel
		● Polished stainless steel
		● Glossy gold

## Synergy™ - cooker control units and fused connection units - Authentic



## Synergy™ - shaver sockets, cable outlets, blanking plates and cord outlets - Authentic



8 332 29

8 334 37

Slim front plate:

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries. Compact mechanism for maximum wiring space

Pack	Cat.Nos	Cooker control units - 250 V~
		Conform to BS 4177: 1992 For flush-mounting, back box to be min. 47 mm deep Nominal plate dimensions: 86 x 146 mm
		<b>45 A DP switch + 13 A DP switched socket outlet with blue LED power indicator</b>
1	8 330 29	● Brushed stainless steel
1	8 332 29	● Polished stainless steel
1	8 334 29	● Glossy gold
		<b>Fused connection units 13 A - 250 V~</b>
		Conform to BS 1363: Part. 4 Front cable outlet with cord grip Fuse supplied Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 25 mm deep
		<b>Unswitched with cord outlet</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 32	● Brushed stainless steel
1	8 332 32	● Polished stainless steel
1	8 334 32	● Glossy gold
		<b>Unswitched without cord outlet</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 30	● Brushed stainless steel
1	8 332 30	● Polished stainless steel
1	8 334 30	● Glossy gold
		<b>Unswitched with blue LED power indicator</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 31	● Brushed stainless steel
1	8 332 31	● Polished stainless steel
1	8 334 31	● Glossy gold
		<b>Unswitched with blue LED power indicator + cord outlet</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 33	● Brushed stainless steel
1	8 332 33	● Polished stainless steel
1	8 334 33	● Glossy gold
		<b>DP switched without cord outlet</b>
		Nominal plate dimensions: 86 x 146 mm
1	8 330 34	● Brushed stainless steel
1	8 332 34	● Polished stainless steel
1	8 334 34	● Glossy gold
		<b>DP switched with blue LED power indicator</b>
		Nominal plate dimensions: 86 x 146 mm
1	8 330 35	● Brushed stainless steel
1	8 332 35	● Polished stainless steel
1	8 334 35	● Glossy gold
		<b>DP switched with blue LED power indicator + cord outlet</b>
		Nominal plate dimensions: 86 x 146 mm
1	8 330 37	● Brushed stainless steel
1	8 332 37	● Polished stainless steel
1	8 334 37	● Glossy gold



8 332 90

8 330 19

8 334 95

Slim front plates:

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries. Compact mechanism for maximum wiring space

Pack	Cat.Nos	Shaver sockets
		Conform to BS EN 61558-2-5 Suitable for use with European, British and Australian 2 pin plugs Rating: 20 VA IP 24 Screwless live and neutral terminals For flush-mounting, back box to be min. 45 mm deep Nominal plate dimensions: 146 x 86 mm
		<b>230/120 V~ - 50/60 Hz</b>
1	8 330 90	● Brushed stainless steel
1	8 332 90	● Polished stainless steel
1	8 334 90	● Glossy gold
		<b>Cable outlets</b>
		Conform to BS 5733 Fitted clamp and outlet membrane With terminal block Nominal plate dimensions: 86 x 86 mm
		<b>20 A - 250 V~</b>
1	8 330 19	● Brushed stainless steel
1	8 332 19	● Polished stainless steel
1	8 334 19	● Glossy gold
		<b>45 A - 250 V~</b>
1	8 330 26	● Brushed stainless steel
1	8 332 26	● Polished stainless steel
1	8 334 26	● Glossy gold
		<b>Blanking plates</b>
		<b>1 gang</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 95	● Brushed stainless steel
1	8 332 95	● Polished stainless steel
1	8 334 95	● Glossy gold
		<b>2 gang</b>
		Nominal plate dimensions: 86 x 146 mm
1	8 330 96	● Brushed stainless steel
1	8 332 96	● Polished stainless steel
1	8 334 96	● Glossy gold
		<b>Cord outlets</b>
		<b>1 gang</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 330 52	● Brushed stainless steel
1	8 332 52	● Polished stainless steel
1	8 334 52	● Glossy gold



8 321 31



8 323 32



8 325 33



8 321 51



8 323 57



8 325 50

**Sleek design**

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	Single pole plate switches 10 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 320 01	<b>1 gang - 2-way switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 01	
1	8 324 01	
1	8 320 02	<b>2 gang - 2-way switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 02	
1	8 324 02	

Pack	Cat.Nos	Single pole plate switches 20 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep
1	8 321 31	<b>1 gang - 2-way switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 31	
1	8 325 31	
1	8 321 32	<b>2 gang - 2-way switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 32	
1	8 325 32	
1	8 321 33	<b>3 gang - 2-way switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 33	
1	8 325 33	
1	8 321 34	<b>4 gang - 2-way switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 34	
1	8 325 34	

Pack	Cat.Nos	Single pole intermediate 10 AX - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep
1	8 320 05	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 05	
1	8 324 05	

Pack	Cat.Nos	Single pole push switches 10 A - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 320 07	<b>1 gang - 2-way push switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 07	
1	8 324 07	

Pack	Cat.Nos	Push on/off rotary universal dimmers 5 W/300 W 100 - 240 V~ - 50/60 Hz
		Conform to IEC 60669-2-1 For flush-mounting back box to be min. 40 mm deep Equipped with overvoltage and short-circuit protection Screw terminals For all types of lamps: - dimmable LEDs: 5 W to 75 W - dimmable compact fluorescent lamps: 5 W to 75 W - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V: 5 W to 300 W When switched on, gradually (2 seconds) lights up at the level set before last switch-off Nominal plate dimensions: 86 x 86 mm
1	8 321 51	<b>1 gang - 2-way push switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 51	
1	8 325 51	

Pack	Cat.Nos	Push on/off rotary dimmers 400 W 100 - 240 V~ - 50/60 Hz
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
1	8 321 56	<b>1 gang - 2 way</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 56	
1	8 325 56	
1	8 321 57	<b>2 gang - 2 way</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 57	
1	8 325 57	

Pack	Cat.Nos	Push on/off rotary dimmers 1000 W 250 V~ - 50/60 Hz
		Conform to BS EN 60669-1 For flush-mounting back box to be min. 40 mm deep - 60-1000 W (230 V) - 60-500 W (127 V) for incandescent and halogen lamps 60-600 VA (230 V) - 60-300 VA (127 V) for halogen lamps with electronic transformers 60-100 VA (230 V) - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Nominal plate dimensions: 86 x 86 mm
1	8 321 50	<b>1 gang - 2-way push switch</b>  ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 50	
1	8 325 50	

# Synergy™

## double pole switches - Sleek Design



8 320 10



8 322 16



8 324 12



8 324 23

### Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep Supplied with 1 gang side extension (3 mm thick) Cat.No 8 321 98 in case of extra wiring space needed Nominal plate dimensions: 86 x 86 mm
		<b>DP switch</b>
1	8 320 10	● Brushed stainless steel
1	8 322 10	● Polished stainless steel
1	8 324 10	● Glossy gold
		<b>DP switch + cord outlet</b>
1	8 320 16	● Brushed stainless steel
1	8 322 16	● Polished stainless steel
1	8 324 16	● Glossy gold
		<b>DP switch + blue LED power indicator</b>
1	8 320 12	● Brushed stainless steel
1	8 322 12	● Polished stainless steel
1	8 324 12	● Glossy gold

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 47 mm deep Red rocker Nominal plate dimensions: 86 x 86 mm
		<b>DP switch + blue LED power indicator</b>
1	8 320 23	● Brushed stainless steel
1	8 322 23	● Polished stainless steel
1	8 324 23	● Glossy gold







8 320 50



8 322 54



8 324 57



8 320 40



8 322 41



8 324 43

Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	Telephone sockets
		For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
		<b>UK master</b>
1	8 320 50	● Brushed stainless steel
1	8 322 50	● Polished stainless steel
1	8 324 50	● Glossy gold
		<b>UK secondary</b>
1	8 320 51	● Brushed stainless steel
1	8 322 51	● Polished stainless steel
1	8 324 51	● Glossy gold
		<b>RJ 11 / RJ 12 - single</b>
1	8 320 54	● Brushed stainless steel
1	8 322 54	● Polished stainless steel
1	8 324 54	● Glossy gold
		<b>Data sockets Cat. 6</b>
		Rapid cable connection For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
		<b>RJ 45 - single</b>
1	8 320 56	● Brushed stainless steel
1	8 322 56	● Polished stainless steel
1	8 324 56	● Glossy gold
		<b>RJ 45 - twin</b>
1	8 320 57	● Brushed stainless steel
1	8 322 57	● Polished stainless steel
1	8 324 57	● Glossy gold

Pack	Cat.Nos	Television sockets
		For flush-mounting, back box to be min. 35 mm deep Screened Nominal plate dimensions: 86 x 86 mm
		<b>TV sockets - single male</b>
1	8 320 40	● Brushed stainless steel
1	8 322 40	● Polished stainless steel
1	8 324 40	● Glossy gold
		<b>SAT sockets - single "F" type</b>
1	8 320 41	● Brushed stainless steel
1	8 322 41	● Polished stainless steel
1	8 324 41	● Glossy gold
		<b>TV-R-SAT sockets - "F" type</b>
1	8 320 43	● Brushed stainless steel
1	8 322 43	● Polished stainless steel
1	8 324 43	● Glossy gold



8 320 75



8 322 61



8 324 89



8 322 59



8 320 44

Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	Socket outlets 13 A - 250 V~
		Conform to BS EN 1363: Part. 2 With safety shutter mechanism For flush-mounting, back box to be min. 35 mm deep ASTA licence
		<b>1 gang unswitched</b> Nominal plate dimensions: 86 x 86 mm
1	8 320 65	● Brushed stainless steel
1	8 322 65	● Polished stainless steel
1	8 324 65	● Glossy gold
		<b>2 gang unswitched</b> Nominal plate dimensions: 86 x 146 mm
1	8 320 75	● Brushed stainless steel
1	8 322 75	● Polished stainless steel
1	8 324 75	● Glossy gold

		<b>Single pole socket outlets 13 A - 250 V~</b>
		Conform to BS EN 1363: Part. 2 With safety shutter mechanism For flush-mounting, back box to be min. 35 mm deep ASTA licence
		<b>1 gang switched</b> Nominal plate dimensions: 86 x 86 mm
1	8 320 66	● Brushed stainless steel
1	8 322 66	● Polished stainless steel
1	8 324 66	● Glossy gold
		<b>1 gang switched with blue LED power indicator</b> Nominal plate dimensions: 86 x 86 mm
1	8 320 67	● Brushed stainless steel
1	8 322 67	● Polished stainless steel
1	8 324 67	● Glossy gold
		<b>2 gang switched</b> Nominal plate dimensions: 86 x 146 mm
1	8 320 76	● Brushed stainless steel
1	8 322 76	● Polished stainless steel
1	8 324 76	● Glossy gold
		<b>2 gang switched with blue LED power indicator</b> Nominal plate dimensions: 86 x 146 mm
1	8 320 77	● Brushed stainless steel
1	8 322 77	● Polished stainless steel
1	8 324 77	● Glossy gold

		<b>Double pole socket outlets 13 A - 250 V~</b>
		Conform to BS EN 1363: Part. 2 With safety shutter mechanism For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm ASTA licence
		<b>1 gang switched</b>
1	8 320 60	● Brushed stainless steel
1	8 322 60	● Polished stainless steel
1	8 324 60	● Glossy gold
		<b>1 gang switched with blue LED power indicator</b>
1	8 320 61	● Brushed stainless steel
1	8 322 61	● Polished stainless steel
1	8 324 61	● Glossy gold

Pack	Cat.Nos	Double pole socket outlets 13 A - 250 V~ (continued)
		Conform to BS EN 1363: Part. 2 With safety shutter mechanism For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 146 mm ASTA licence
		<b>2 gang switched</b>
1	8 320 70	● Brushed stainless steel
1	8 322 70	● Polished stainless steel
1	8 324 70	● Glossy gold
		<b>2 gang switched with blue LED power indicator</b>
1	8 320 71	● Brushed stainless steel
1	8 322 71	● Polished stainless steel
1	8 324 71	● Glossy gold

		<b>Socket outlets 15 A - 250 V~</b>
		Conform to BS 546 Patented 3 pin safety shutter mechanism For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm
		<b>1 gang switched</b>
1	8 320 89	● Brushed stainless steel
1	8 322 89	● Polished stainless steel
1	8 324 89	● Glossy gold

		<b>Socket outlets 5 A - 250 V~</b>
		Conform to BS 546 Patented 3 pin safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
		<b>1 gang switched - single pole</b>
1	8 320 69	● Brushed stainless steel
1	8 322 69	● Polished stainless steel
1	8 324 69	● Glossy gold

		<b>Socket outlets 2 A - 250 V~</b>
		Conform to BS 546 For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
		<b>1 gang unswitched</b>
1	8 320 59	● Brushed stainless steel
1	8 322 59	● Polished stainless steel
1	8 324 59	● Glossy gold

		<b>Double USB socket</b>
		Conform to IEC 62684 For flush-mounting, back box to be min. 40 mm deep Input voltage: 110 V/ 230 V 5 V (output) - 2400 mA Wiring with 1.5 Sq.mm and 2.5 Sq.mm (only live and neutral)
1	8 320 44	● Brushed stainless steel
1	8 322 44	● Polished stainless steel
1	8 324 44	● Glossy gold

## Synergy™ - cooker control units, fused connection units and cable outlets - Sleek Design



8 320 32

8 322 37

8 324 19

Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	Cooker control units - 250 V~
		Conform to BS 4177: 1992 For flush-mounting, back box to be min 47 mm deep Nominal plate dimensions: 86 x 146 mm
1	8 320 29	 <b>45 A DP switch + 13 A DP switched socket outlet - with blue LED power indicator</b> ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 29	
1	8 324 29	

		<b>Fused connection units unswitched 13 A - 250 V~</b>
		Conform to BS 1363: Part. 4. Front cable outlet with cord grip. Fuses supplied. Locked captive fuse carrier (padlockable). For flush-mounting, back box to be min. 35 mm deep. Supplied with 1 gang side extension Cat.No 8 321 98 (3 mm thick) in case of extra wiring space needed Nominal plate dimensions: 86 x 86 mm
1	8 320 32	 <b>Unswitched - with cord outlet</b> ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 32	
1	8 324 32	

		<b>Fused connection units switched 13 A - 250 V~</b>
		Conform to BS 1363: Part. 4. Front cable outlet with cord grip. Fuses supplied. Locked captive fuse carrier (padlockable). For flush-mounting, back box to be min. 35 mm deep. Supplied with 1 gang side extension Cat.No 8 321 98 (3 mm thick) in case of extra wiring space needed Nominal plate dimensions: 86 x 86 mm
1	8 320 35	 <b>DP switched - without cord outlet</b> ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 35	
1	8 324 35	
1	8 320 37	 <b>DP switched - with blue LED power indicator + cord outlet</b> ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 37	
1	8 324 37	

		<b>Cable outlets</b>
		Conform to BS 5733. Fitted with clamp and outlet membrane. With terminal block Nominal plate dimensions: 86 x 86 mm
1	8 320 19	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 19	
1	8 324 19	
1	8 320 26	 ● Anthracite grey colour (plastic)

## Synergy™ hotel equipment - Sleek Design



8 320 90

8 323 00

8 325 01

Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos	Shaver sockets
		Conform to BS EN 61558-2-5 Suitable for use with European, British, American and Australian 2 pin plugs. Rating: 20 VA. IP 24 Screwless live and neutral terminals For flush-mounting, back box to be min. 45 mm deep Supplied with 2 gang side extension Cat.No 8 321 99 (3 mm thick) in case of extra wiring space needed Nominal plate dimensions: 146 x 86 mm
1	8 320 90	 <b>230 V / 120 V - 50/60 Hz</b> ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 322 90	
1	8 324 90	

		<b>Key card switch 230 V</b>
		For energizing a circuit by inserting a key fob or a smart card (access card for a hotel room) Example of use: hotel room power supply only when guest is present Time delay of approx. 30 sec. after card removal To be equipped with a single pole latching relay or contactor
1	8 321 00	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 00	
1	8 325 00	

		<b>Hotel call indicator DND/Please clean up</b>
		Indicator for corridor Indicator lamp and bell push Installed in the corridor, displays calls
1	8 321 01	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 01	
1	8 325 01	

		<b>Hotel call indicator - internal room control</b>
		Internal Control Unit Allows the user to select the desired setting Supplied with LED
1	8 321 02	 ● Brushed stainless steel ● Polished stainless steel ● Glossy gold
1	8 323 02	
1	8 325 02	



Synergy™

blanking plates, cord outlets - Sleek Design



8 320 95



8 322 96



8 320 52

Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

GG: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Pack	Cat.Nos	Blanking plates
		<b>1 gang</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 320 95	● Brushed stainless steel
1	8 322 95	● Polished stainless steel
1	8 324 95	● Glossy gold
		<b>2 gang</b>
		Nominal plate dimensions: 86 x 146 mm
1	8 320 96	● Brushed stainless steel
1	8 322 96	● Polished stainless steel
1	8 324 96	● Glossy gold
		<b>Cord outlets</b>
		<b>1 gang</b>
		Nominal plate dimensions: 86 x 86 mm
1	8 320 52	● Brushed stainless steel
1	8 322 52	● Polished stainless steel
1	8 324 52	● Glossy gold

SYNERGY™

# New Packaging Versatile & Practical



Suitable for product display on hooks

Can easily be stocked in shelf racks.

Transparent cover for easy identification of the finish. Highlights the quality of the product.

Informative and clear label.



Front plates: grey epoxy coated steel  
Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Supplied complete with close fit 43 mm deep surface-mounting back box

Pack	Cat.Nos	<b>Single pole plate switches 10 AX - 250 V~</b>
5	7 338 00	Conform to BS EN 60669-1: 2000 Flush-mounting back box: min. 16 mm deep Nominal plate dimensions: 86 x 86 mm
5	7 338 01	1 gang - 1-way
5	7 338 05	1 gang - 2-way
5	7 338 02	1 gang - intermediate
5	7 338 02	2 gang - 2-way
5	7 338 03	3 gang - 2-way
<b>Double pole switches 20 A - 250 V~</b>		
5	7 338 10	Conform to BS EN 60669-1: 2000 Flush-mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm DP switch
5	7 338 16	DP switch with cord outlet + red LED power indicator
5	7 338 12	DP switch + red LED power indicator
<b>Double pole switch 45 A - 250 V~</b>		
5	7 338 21	Conforms to BS EN 60669-1: 2000 Red rocker Flush-mounting back box: min. 48 mm deep Nominal plate dimensions: 146 x 86 mm DP switch + red power indicator

Pack	Cat.Nos	<b>Television sockets</b>
5	7 338 40	Flush-mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm Screened TV - single, male
1	7 338 41	Screened satellite - single, "F" type
<b>Telephone sockets</b>		
5	7 338 50	Flush-mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm Single master
5	7 338 51	Single secondary
<b>Data sockets Cat. 6</b>		
1	7 338 56	Rapid cable connection Flush-mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm RJ 45 - single
1	7 338 57	RJ 45 - twin
<b>Blanking plates</b>		
5	7 338 95	1 gang Nominal plate dimensions: 86 x 86 mm
5	7 338 96	2 gang Nominal plate dimensions: 86 x 146 mm
<b>Cable outlet 20 A - 250 V~</b>		
5	7 338 19	Conforms to BS 5733: 1995 Flush-mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 20 A - with terminal block and outlet gland



7 338 65



7 338 71



7 338 80



7 338 82



7 338 89

Front plates: grey epoxy coated steel. Terminal screws captive and backed off ready for cabling - large angled terminal entries  
Supplied complete with close fit 43 mm deep surface-mounting back box

Pack	Cat.Nos	Socket outlets 13 A - 250 V~
5	7 338 65	Conform to BS 1363 - Part 2: 1995 With safety shutter mechanism Flush-mounting back box: min. 25 mm deep 1 gang - unswitched Nominal plate dimensions: 86 x 86 mm
5	7 338 75	2 gang - unswitched Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Double pole socket outlets 13 A - 250 V~
5	7 338 60	Conform to BS 1363 - Part 2: 1995 With safety shutter mechanism Flush-mounting back box: min. 25 mm deep <b>Switched</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 338 70	2 gang Nominal plate dimensions: 86 x 146 mm
5	7 338 61	<b>Switched with red LED power indicator</b> 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 338 71	2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	RCD sockets 13 A - 250 V~
1	7 338 80	Conform to BS 7288: 1990 and BS 1363 - Part 2: 1995 Conventional earth pin release shutter Maximum operating current 16 A Electronic RCD module with a membrane switch for "test and reset" Flush mounting back box : min. 25 mm deep <b>ELO - DP 30 mA</b> Trips in the event of a power failure Ideal for applications where it is desirable to prevent automatic reactivation of equipment after a power failure. For hazardous, e.g. machinery, power tools
1	7 338 82	1 gang Nominal plate dimensions: 86 x 86 mm
		2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	RCD sockets 13 A - 250 V~ (continued)
		<b>ELR - DP 30 mA</b> Trips in the event of a power failure Ideal for applications where it is desirable to automatically re-activate equipment after a power failure. E.g. fridge, freezer, unmanned areas
1	7 338 81	1 gang Nominal plate dimensions: 86 x 86 mm
1	7 338 83	2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Socket outlets 15 A - 250 V~
5	7 338 88	Conform to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush-mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched
5	7 338 89	1 gang - switched

Pack	Cat.Nos	Fused connection units 13 A - 250 V~
		Conform to BS 1363 - Part 4: 1995. Fused 13 A (fuse supplied). Fuse drawer retained by quarter turn catch, drawer padlockable in open position for safety. Flush-mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm
5	7 338 34	<b>Double pole switched</b> Without cord outlet
5	7 338 35	With red LED power indicator
5	7 338 36	With cord outlet
5	7 338 37	With cord outlet + red LED power indicator
5	7 338 30	<b>Unswitched</b> Without cord outlet
5	7 338 31	With red LED power indicator
5	7 338 32	With cord outlet
5	7 338 33	With cord outlet + red LED power indicator


# Grid System

## Multiple functions

## One control point



- A perfect blend of style and versatility.
- Grid plates available in all sizes from 1 to 24 gang.

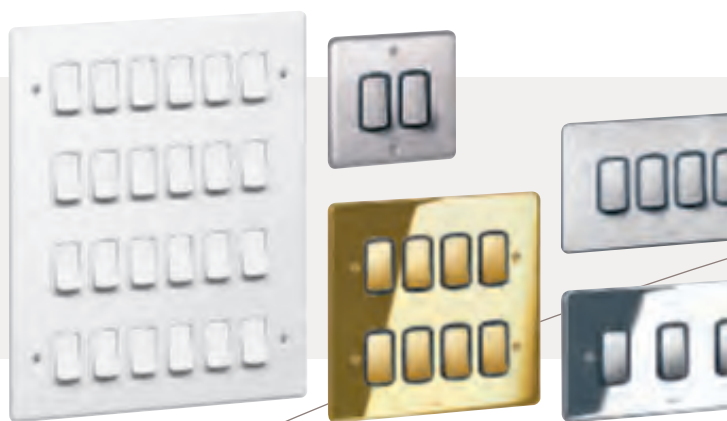

- Switch modules available in five finishes.



## Synergy™

### Grid modules - decorative rockers



8 326 00

8 326 06

8 326 12



Front plate selection charts p. 44-45

Pack	Cat.Nos	Single pole switches 10 AX - 250 V~
1	8 326 00	<b>1-way switch</b>
1	8 326 06	● Brushed stainless steel
1	8 326 12	● Polished stainless steel
		● Glossy gold
1	8 326 01	<b>2-way switch</b>
1	8 326 07	● Brushed stainless steel
1	8 326 13	● Polished stainless steel
		● Glossy gold
1	8 326 02	<b>Intermediate switch</b>
1	8 326 08	● Brushed stainless steel
1	8 326 14	● Polished stainless steel
		● Glossy gold
		<b>Single pole switches 20 AX - 250 V~</b>
1	8 326 03	<b>1-way switch</b>
1	8 326 09	● Brushed stainless steel
1	8 326 15	● Polished stainless steel
		● Glossy gold
1	8 326 04	<b>2-way switch</b>
1	8 326 10	● Brushed stainless steel
1	8 326 16	● Polished stainless steel
		● Glossy gold
1	8 326 05	<b>2-way retractive centre off switch</b>
1	8 326 11	● Brushed stainless steel
1	8 326 17	● Polished stainless steel
		● Glossy gold

# Synergy™

## Grid modules - white and anthracite rockers without marking



Front plate selection charts **p. 44-45**

Pack	Cat.Nos		Single pole switches 10 AX - 250 V~
	White	Anthracite	Conform to BS EN 60669-1
10	7 354 00	7 355 00	1 way
10	7 354 01	7 355 01	1 way + neon
10	7 354 03	7 355 03	2 way
10	7 354 07	7 355 07	Intermediate
10	7 354 05	7 355 05	2-way push switch
10	7 354 06	7 355 06	2-way push switch marked "BELL"

Pack	Cat.Nos		Single pole switches 20 AX - 250 V~
	White	Anthracite	Conform to BS EN 60669-1
10	7 354 10	7 355 10	1 way
10	7 354 11	7 355 11	1 way + neon
10	7 354 12	7 355 12	2 way
10	7 354 18	7 355 18	Intermediate
10	7 354 13	7 355 13	2-way centre off
10	7 354 14	7 355 14	2-way retractive centre off
10	7 354 15	7 355 15	2-way push switch

Pack	Cat.Nos		Single pole key switches 20 AX - 250 V~
	White	Anthracite	Conform to BS EN 60669-1
10	7 354 16	7 355 16	Key supplied
10	7 354 17	7 355 17	2-way
			2-way retractive centre off

Pack	Cat.Nos		Double pole switches 20 AX - 250 V~
	White	Anthracite	Conform to BS EN 60669-1
10	7 354 20	7 355 20	Switch
10	7 354 21	7 355 21	Switch + neon
10	7 354 22	7 355 22	Push to make
10	7 354 25	7 355 25	Push to break

Pack	Cat.Nos		Double pole key switches 20 AX - 250 V~
	White	Anthracite	Conform to BS EN 60669-1
10	7 354 23	7 355 23	Key supplied
10	7 354 24	7 355 24	Key switch
			Key switch + neon

Pack	Cat.Nos		Dimmers 100 - 240 V~ - 50-60 Hz
	White	Anthracite	Conform to BS EN 60669-2-1
1	7 354 46	7 355 46	2-way - 300 W - push dimmer
1	7 354 48	7 355 48	2-way rotary dimmer - for 0-10 V ballasts - 400 W

Pack	Cat.Nos		Time delay switches
	White	Anthracite	
1	7 354 47	7 355 47	Time delay switch 300 W

Pack	Cat.Nos		Telephone sockets
	White	Anthracite	
1	7 354 50	7 355 50	BT master
1	7 354 51	7 355 51	BT secondary

Pack	Cat.Nos		Data sockets - Cat. 6
	White	Anthracite	
10	7 352 56	7 353 56	RJ 45 - 8 contacts

Pack	Cat.Nos		Television sockets
	White	Anthracite	
10	7 354 40	7 355 40	Screened TV single, male
10	7 354 41	7 355 41	Screened TV-SAT

Pack	Cat.Nos		Loudspeaker sockets
	White	Anthracite	
10	7 352 65	7 353 65	Hi-Fi loudspeaker socket

Pack	Cat.Nos		Fuse carriers 13 A - 250 V~
	White	Anthracite	
10	7 350 30	7 351 30	Fuse carrier




















Pack	Cat.Nos		Accessories
	White	Anthracite	
10	7 350 62	7 351 62	Indicator - green neon
10	7 350 60	7 351 60	Indicator - red neon
20	7 354 36	7 355 36	Blanking plate

GRID MODULES	ARCHITRAVES		FRONT PLATES WITH SMALL APERTURES				
	1 gang	2 gang	1 gang		2 gang		
	1 module	2 modules	1 module	2 modules	3 modules	4 modules	
							
Dimensions (mm)	86 x 36	146 x 36	86 x 86	86 x 86	86 x 146	86 x 146	
White 	7 301 80	7 301 81	7 301 91	7 301 92	7 301 93	7 301 94	
Authentic Brushed stainless steel 	8 331 80	8 331 81	8 331 91	8 331 92	8 331 93	8 331 94	
Authentic Polished stainless steel 	8 333 80	8 333 81	8 333 91	8 333 92	8 333 93	8 333 94	
Authentic Glossy gold 	8 335 80	8 335 81	8 335 91	8 335 92	8 335 93	8 335 94	
Sleek Design Brushed stainless steel 	-	-	8 321 91 <sup>(1)</sup>	8 321 92 <sup>(1)</sup>	8 321 93 <sup>(1)</sup>	8 321 94 <sup>(1)</sup>	
Sleek Design Polished stainless steel 	-	-	8 323 91 <sup>(1)</sup>	8 323 92 <sup>(1)</sup>	8 323 93 <sup>(1)</sup>	8 323 94 <sup>(1)</sup>	
Sleek Design Glossy gold 	-	-	8 325 91	8 325 92	8 325 93	8 325 94	
Metalclad 	-	-	7 339 91	7 339 92	7 339 93	7 339 94	
GRID YOKES							
							
For White, Authentic, Sleek Design and Metalclad	1 x 7 354 95	1 x 7 354 96	1 x 7 354 90	1 x 7 354 91	1 x 7 354 92	1 x 7 354 92	
BOXES							
Flush-mounting	-	-	-	-	-	-	
Flush-mounting with phase barriers	-	-	-	-	-	-	
Surface-mounting, steel with knockouts	-	-	-	-	-	-	
Surface-mounting, steel without knockouts	-	-	-	-	-	-	
Surface-mounting, metal with knockouts	-	-	7 364 00	7 364 00	7 364 01	7 364 01	
Example of association:							
<div><div><div>Authentic</div><div> +  = </div></div><div><div>Sleek Design</div><div> +  = </div></div></div>							

1: Yokes supplied with front plate

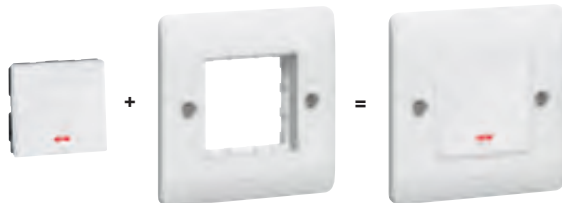

	FRONT PLATES WITH SMALL APERTURES					
	2 x 2 gang		3 x 2 gang		3 x 3 gang	4 x 3 gang
	6 modules	8 modules	9 modules	12 modules	18 modules	24 modules
						
	146 x 146	146 x 146	207 x 146	207 x 146	267 x 206	267 x 206
	7 301 82	7 301 83	7 301 84	7 301 85	7 301 86	7 301 87
	8 331 82	8 331 83	8 331 84	8 331 85	8 331 86	8 331 87
	8 333 82	8 333 83	8 333 84	8 333 85	8 333 86	8 333 87
	8 335 82	8 335 83	8 335 84	8 335 85	8 335 86	8 335 87
	8 321 95 <sup>(1)</sup>	8 321 96 <sup>(1)</sup>	-	-	-	-
	8 323 95 <sup>(1)</sup>	8 323 96 <sup>(1)</sup>	-	-	-	-
	8 325 95	8 325 96	-	-	-	-
	7 339 82	7 339 83	7 339 84	7 339 85	7 339 86	7 339 87
						
	2 x 7 354 92	2 x 7 354 92	3 x 7 354 92	3 x 7 354 92	3 x 7 354 93	4 x 7 354 93
	0 818 52	0 818 52	0 818 53	0 818 53	0 818 54	0 818 55
	-	-	0 818 57	0 818 57	-	-
	7 364 18	7 364 18	7 364 28	7 364 28	-	-
	7 364 22	7 364 22	7 364 32	7 364 32	-	-
	-	-	-	-	-	-

GRID SYSTEM	FRONT PLATES FOR ARTEOR MECHANISMS					
	1 gang for 1 Arteor module	1 gang for 2 Arteor modules	2 gang for 3 Arteor modules	2 gang for 4 Arteor modules	2 x 2 gang for 8 Arteor modules	3 x 3 gang for 18 Arteor modules
FRONT PLATES	Clip-in carrier plate - No yoke required				Yoke required	
						
Dimensions (mm)	86 x 86	86 x 86	86 x 146	86 x 146	146 x 146	267 x 207
White 	7 300 91	7 300 92	7 300 93	7 300 94	7 301 88	7 301 90
Authentic Brushed stainless steel 	8 330 91	8 330 92	8 330 93	8 330 94	8 331 88	8 331 90
Authentic Polished stainless steel 	8 332 91	8 332 92	8 332 93	8 332 94	8 333 88	8 333 90
Authentic Glossy gold 	8 334 91	8 334 92	8 334 93	8 334 94	8 335 88	8 335 90
Sleek Design Brushed stainless steel 	8 320 91	8 320 92	8 320 93	8 320 94	-	-
Sleek Design Polished stainless steel 	8 322 91	8 322 92	8 322 93	8 322 94	-	-
Sleek Design Glossy gold 	8 324 91	8 324 92	8 324 93	8 324 94	-	-
Metalclad 	7 338 91 <sup>(1)</sup>	7 338 92 <sup>(1)</sup>	7 338 93 <sup>(1)</sup>	7 338 94 <sup>(1)</sup>	-	-
GRID YOKES						
Grid yokes	No yoke required				 2 x 7 354 74	 3 x 7 354 76
Examples with Arteor mechanisms						
						
						
						

1: Supplied with back box

# Catalogue number index

Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack
<b>6 780 00</b>			7 301 30	23	10	7 354 10	43	10	8 320 51	36	1
6 781 33	25	1	31	-	10	11	-	10	52	39	1
34	-	1	32	-	10	12	-	10	54	36	1
37	-	1	33	-	10	13	-	10	56	-	1
38	-	1	34	-	10	14	-	10	57	-	1
			35	-	10	15	-	10	59	37	1
<b>7 300 00</b>			40	24	10	16	-	10	60	-	1
7 300 00	23	10	41	-	1	17	-	10	61	-	1
01	-	10	44	-	10	18	-	10	65	-	1
02	-	10	45	-	10	20	-	10	66	-	1
03	-	10	50	23	1	21	-	10	67	-	1
04	-	5	56	-	1	22	-	10	69	-	1
05	-	10	57	-	1	23	-	10	70	-	1
06	-	5	58	27	10	24	-	10	71	-	1
07	-	5	61	25	5	25	-	10	75	-	1
08	-	10	62	-	10	36	-	20	76	-	1
09	-	10	<b>7 310 00</b>			40	-	10	77	-	1
10	24	10	7 311 51	23	1	41	-	10	89	-	1
11	23	5	<b>7 330 00</b>			46	-	1	90	38	1
12	24	10	7 338 00	40	5	47	-	1	95	39	1
19	27	10	01	-	5	48	-	1	96	-	1
20	24	5	02	-	5	50	-	1	<b>8 321 00</b>		
21	-	5	03	-	5	51	-	1	01	-	1
22	-	10	05	-	5	<b>7 355 00</b>			02	-	1
23	-	10	10	-	5	01	-	10	31	34	1
24	23	10	12	-	5	03	-	10	32	-	1
26	27	5	16	-	5	05	-	10	33	-	1
28	-	5	19	-	5	06	-	10	34	-	1
29	-	5	21	-	5	07	-	10	50	-	1
32	-	10	30	41	5	10	-	10	51	-	1
33	-	10	31	-	5	11	-	10	56	-	1
36	-	10	32	-	5	12	-	10	57	-	1
37	-	10	33	-	5	13	-	10	<b>8 322 01</b>		
40	24	10	34	-	5	14	-	10	02	-	1
41	-	1	35	-	5	15	-	10	05	-	1
43	-	1	36	-	5	16	-	10	07	-	1
49	23	1	37	-	5	17	-	10	10	35	1
50	24	10	40	40	5	18	-	10	12	-	1
51	-	10	41	-	1	20	-	10	16	-	1
53	27	10	50	-	5	21	-	10	19	38	1
54	24	10	51	-	5	22	-	10	23	35	1
56	-	1	56	-	1	23	-	10	29	38	1
57	-	1	57	-	1	24	-	10	32	-	1
58	27	10	60	41	5	25	-	10	35	-	1
59	26	10	61	-	5	36	-	20	37	-	1
60	25	10	65	-	5	40	-	10	40	36	1
61	-	10	70	-	5	41	-	10	41	-	1
64	-	10	71	-	5	46	-	1	43	-	1
65	-	10	75	-	5	47	-	1	44	37	1
66	-	10	80	-	1	48	-	1	50	36	1
67	-	10	81	-	1	50	-	1	51	-	1
68	26	10	82	-	1	51	-	1	52	39	1
69	-	10	83	-	1	<b>7 360 00</b>			54	36	1
70	25	5	88	-	5	7 364 06	27	10	56	-	1
71	-	5	89	-	5	07	-	10	57	-	1
74	-	5	95	40	5	10	-	5	59	37	1
75	-	5	96	-	5	11	-	5	60	-	1
76	-	5	<b>7 350 00</b>			13	-	5	61	-	1
77	-	5	7 350 30	43	10	<b>8 320 00</b>			65	-	1
80	26	10	60	-	10	8 320 01	34	1	66	-	1
81	-	10	62	-	10	02	-	1	67	-	1
82	-	10	<b>7 351 30</b>			05	-	1	69	-	1
83	-	10	30	43	10	07	-	1	70	-	1
84	-	10	60	-	10	10	35	1	71	-	1
85	-	5	62	-	10	12	-	1	75	-	1
86	-	5	<b>7 352 56</b>			16	-	1	76	-	1
88	-	10	56	43	10	19	38	1	77	-	1
89	-	10	65	-	10	23	35	1	89	-	1
90	-	1	<b>7 353 56</b>			26	38	1	90	38	1
95	27	10	56	43	10	29	-	1	95	39	1
96	-	10	65	-	10	32	-	1	96	-	1
99	24	10	<b>7 354 00</b>			35	-	1	<b>8 323 00</b>		
7 301 00	24	10	01	-	10	37	-	1	01	-	1
07	23	5	03	-	10	40	36	1	02	-	1
10	24	10	05	-	10	41	-	1	31	34	1
12	-	10	06	-	10	43	-	1	32	-	1
20	-	5	07	-	10	44	37	1	33	-	1
22	-	10				50	36	1	34	-	1
24	23	10									

# Catalogue number index

Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack
8 323 50	34	1	8 330 04	28	1	8 332 30	33	1	8 334 52	33	1
51	-	1	05	-	1	31	-	1	54	30	1
56	-	1	07	-	1	32	-	1	56	-	1
57	-	1	09	29	1	33	-	1	57	30	1
			10	-	1	34	-	1	59	32	1
8 324 01	34	1	12	-	1	35	-	1	60	31	1
02	-	1	16	-	1	37	-	1	61	-	1
05	-	1	19	33	1	40	30	1	65	-	1
07	-	1	21	29	1	41	-	1	66	-	1
10	35	1	22	-	1	43	-	1	67	-	1
12	-	1	23	-	1	44	32	1	68	32	1
16	-	1	26	33	1	50	30	1	69	-	1
19	38	1	29	-	1	51	-	1	70	31	1
23	35	1	30	-	1	52	33	1	71	-	1
29	38	1	31	-	1	54	30	1	74	-	1
32	-	1	32	-	1	56	-	1	75	-	1
35	-	1	33	-	1	57	-	1	76	-	1
37	-	1	34	-	1	59	32	1	77	-	1
40	36	1	35	-	1	60	31	1	85	32	1
41	-	1	37	-	1	61	-	1	86	-	1
43	-	1	40	30	1	65	-	1	88	-	1
44	37	1	41	-	1	66	-	1	89	-	1
50	36	1	43	-	1	67	-	1	90	33	1
51	-	1	44	32	1	68	32	1	95	-	1
52	39	1	50	30	1	69	-	1	96	-	1
54	36	1	51	-	1	70	31	1	97	32	1
56	-	1	52	33	1	71	-	1	98	-	1
57	-	1	54	30	1	74	-	1	99	-	1
59	37	1	56	-	1	75	-	1			
60	-	1	57	-	1	76	-	1	8 335 31	28	1
61	-	1	59	32	1	77	-	1	32	-	1
65	-	1	60	31	1	85	32	1	33	-	1
66	-	1	61	-	1	86	-	1	50	-	1
67	-	1	65	-	1	88	-	1	51	-	1
69	-	1	66	-	1	89	-	1	56	-	1
70	-	1	67	-	1	90	33	1	57	-	1
71	-	1	68	32	1	95	-	1	99	32	1
75	-	1	69	-	1	96	-	1			
76	-	1	70	31	1	97	32	1			
77	-	1	71	-	1	98	-	1			
89	-	1	74	-	1	99	-	1			
90	38	1	75	-	1						
95	39	1	76	-	1	8 333 31	28	1			
96	-	1	77	-	1	32	-	1			
			85	32	1	33	-	1			
8 325 00	38	1	86	-	1	50	-	1			
01	-	1	88	-	1	51	-	1			
02	-	1	89	-	1	56	-	1			
31	34	1	90	33	1	57	-	1			
32	-	1	95	-	1	99	32	1			
33	-	1	96	-	1						
34	-	1	97	32	1	8 334 00	28	1			
50	-	1	98	-	1	01	-	1			
51	-	1	99	-	1	02	-	1			
56	-	1				03	-	1			
57	-	1	8 331 31	28	1	04	-	1			
			32	-	1	05	-	1			
8 326 00	42	1	33	-	1	07	-	1			
01	-	1	50	-	1	09	29	1			
02	-	1	51	-	1	10	-	1			
03	-	1	56	-	1	12	-	1			
04	-	1	57	-	1	16	-	1			
05	-	1	99	32	1	19	33	1			
06	-	1				21	29	1			
07	-	1	8 332 00	28	1	22	-	1			
08	-	1	01	-	1	23	-	1			
09	-	1	02	-	1	26	33	1			
10	-	1	03	-	1	29	-	1			
11	-	1	04	-	1	30	-	1			
12	-	1	05	-	1	31	-	1			
13	-	1	07	-	1	32	-	1			
14	-	1	09	29	1	33	-	1			
15	-	1	10	-	1	34	-	1			
16	-	1	12	-	1	35	-	1			
17	-	1	16	-	1	37	-	1			
			19	33	1	40	30	1			
8 330 00	28	1	21	29	1	41	-	1			
01	-	1	22	-	1	43	-	1			
02	-	1	23	-	1	44	32	1			
03	-	1	26	33	1	50	30	1			
			29	-	1	51	-	1			





FOLLOW US  
ALSO ON

@ legrand.com

 youtube.com/user/legrand

 facebook.com/Legrand

 twitter.com/Legrand

 pinterest.com/legrandgroup

 instagram.com/legrandnews



**World Headquarters**  
and International Department  
87045 Limoges Cedex - France  
Tel : + 33 (0) 5 55 06 87 87  
Fax: + 33 (0) 5 55 06 74 55