

Liceo

Street light



Features

- Ultra-thin design, beautiful and elegant
- Low heat, electric energy conversion rate in more than 90%
- Integrated die-cast alum in um with external heat dissipation ribs for excellent heat dissipation and increased life



Installation
Street



IK Rating
IK07



IP Rating
IP65







Standard Warranty

TECHNICAL DATA SHEET - LICEO - 15643 - STREET LIGHT



TECHNICAL DATA

Product Data	Street Light
Lamp Type	EPISTAR LED
Wattage	100W
Color Temperature	6000K
Rated Luminaire Luminous Flux	10,000lm
Rated Luminaire Efficiency	100lm/W
IP Rating	65
Beam Angle	140°
Voltage	AC100-240V
Frequency Range	50-60 Hz
CRI	Ra>70
Power Factor	>0.95
Power Distribution	3.5KV
Output Current	2900mA
Operating temperature	-20 °C ~ +50 °C
Safety Class	Class I
IK Rating	07
Material	Aluminium Body
Finish	Black
Life Span	30,000 Hours
Warranty	3 Years
Applications	Outdoors, Commercial, Hospitality etc.

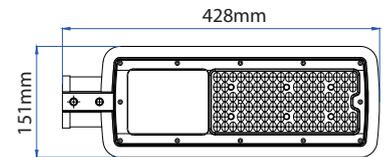

TECHNICAL OPTIONS

Wattage	30W/50W/150W
Color Temperature	3000K-6500K
Beam Angle	70°
Control	Switchable, TRIAC, 1-10V, DALI, 0-10V