

## Cleto

### Flood light Module



### Features

- Light fixture with adjustable direct emission, with high-performance LED light sources
- Does not pollute, does not emit UV rays or thermal radiation
- Ultra high power to give ultra high brightness.
- Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance.



Surface



IP Rating  
IP66

Colour Rendering Index  
 $\geq 80$

5 years  
warranty



Standard Warranty

## TECHNICAL DATA SHEET - CLETO - 15776- FLOOD LIGHT MODULE



### TECHNICAL DATA

Product Data	Flood Light Module
Lamp Type	CREE LED
Driver	Meanwell Driver
Wattage	37W
Color Temperature	2200K
Rated Luminaire Luminous Flux	4,090lm
Rated Luminaire Efficiency	110lm/W
IP Rating	66
Beam Angle	Type II
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>70
Power Factor	>0.9
Current	700mA
Ambient Temperature	-25°C ~ +50°C
Power Tolerance	+5%
Lumen Tolerance	+7%
IK Rating	09
Safety Class	Class II
Material	Die cast aluminium body
Finish	Black
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Signage & Billboards, Area lighting

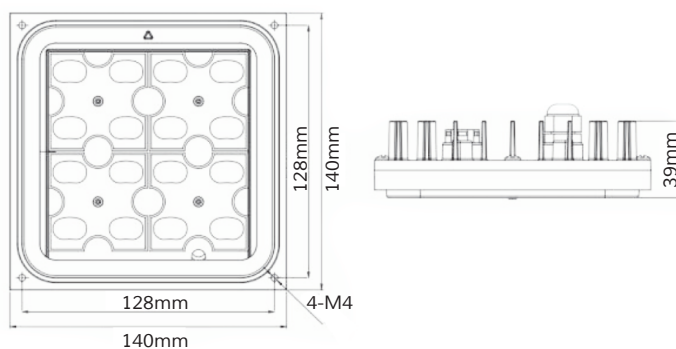

### TECHNICAL OPTIONS

Wattage	10W/15W/20W/28W
Color Temperature	3000K - 5000K
Control	TRIAC, DALI, 1-10V, 0-10V

