



Felipe

Installation instructions


LED Garden lamp series



Outdoors



IP Rating



PC Replacement



90-264V.AC



LED Lifetime


Certifications



Product introduction

- SMD LED, Power system: 15W.
- Aluminum reflector with high reflection.
- Column housing for illumination of walkways, entrances and access roads.
- High intensity tempered glass.
- The lamp body is made of stainless steel.

Dimension drawing

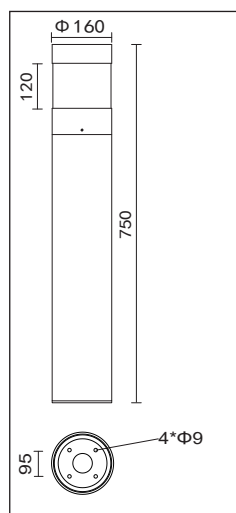

ET5060




Matters needing attention


- Before the lamp is connected, please carefully check the input voltage, so as not to cause damage to the lamp.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the lamps.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- This product can only be installed in dry or sunny weather.
- Can not remove the original structure, to avoid leakage of light.
- Glass with waterproof and dust, such as the discovery of broken glass, please replace the glass in a timely manner.
- Waterproof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Please choose according to product appearance specifications corresponding to the power supply, power cable, not led lamp and metal halide lamp, sodium lamp and motor share a power supply circuit.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

Installation requirements

- open the package to find lamps and install the base plate.
- 4 holes in the diameter of the lamp installed on the ground to fight the hole, with the expansion of the 4 M8*100 stainless steel expansion screws to fix the chassis on the ground (Figure 1).
- the power cord connected to light up the test, and then the lamp body is installed in the installation of the base plate, the power line connection needs to ensure IP68 waterproof performance.
- the lamp on the chassis, with 4 M8*20 stainless steel outside the six corners of the screw (the 4, with a flat pad pad) lock, to ensure that the level of lighting installation (Figure 2).
- lamps can not use external shocks and shocks, so as not to cause deformation.

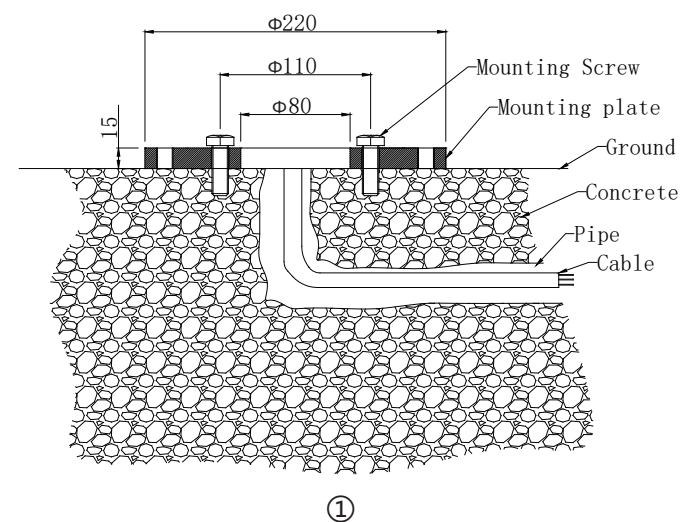

①

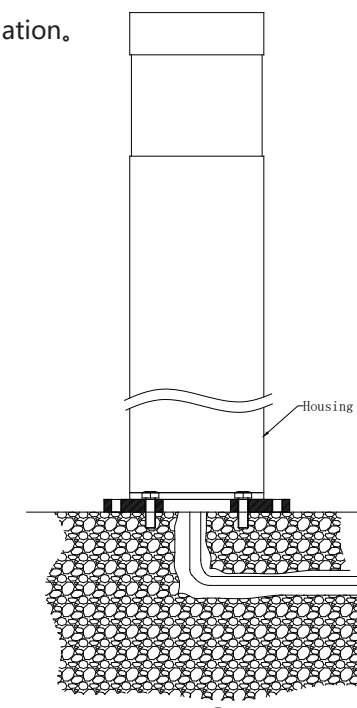

②